


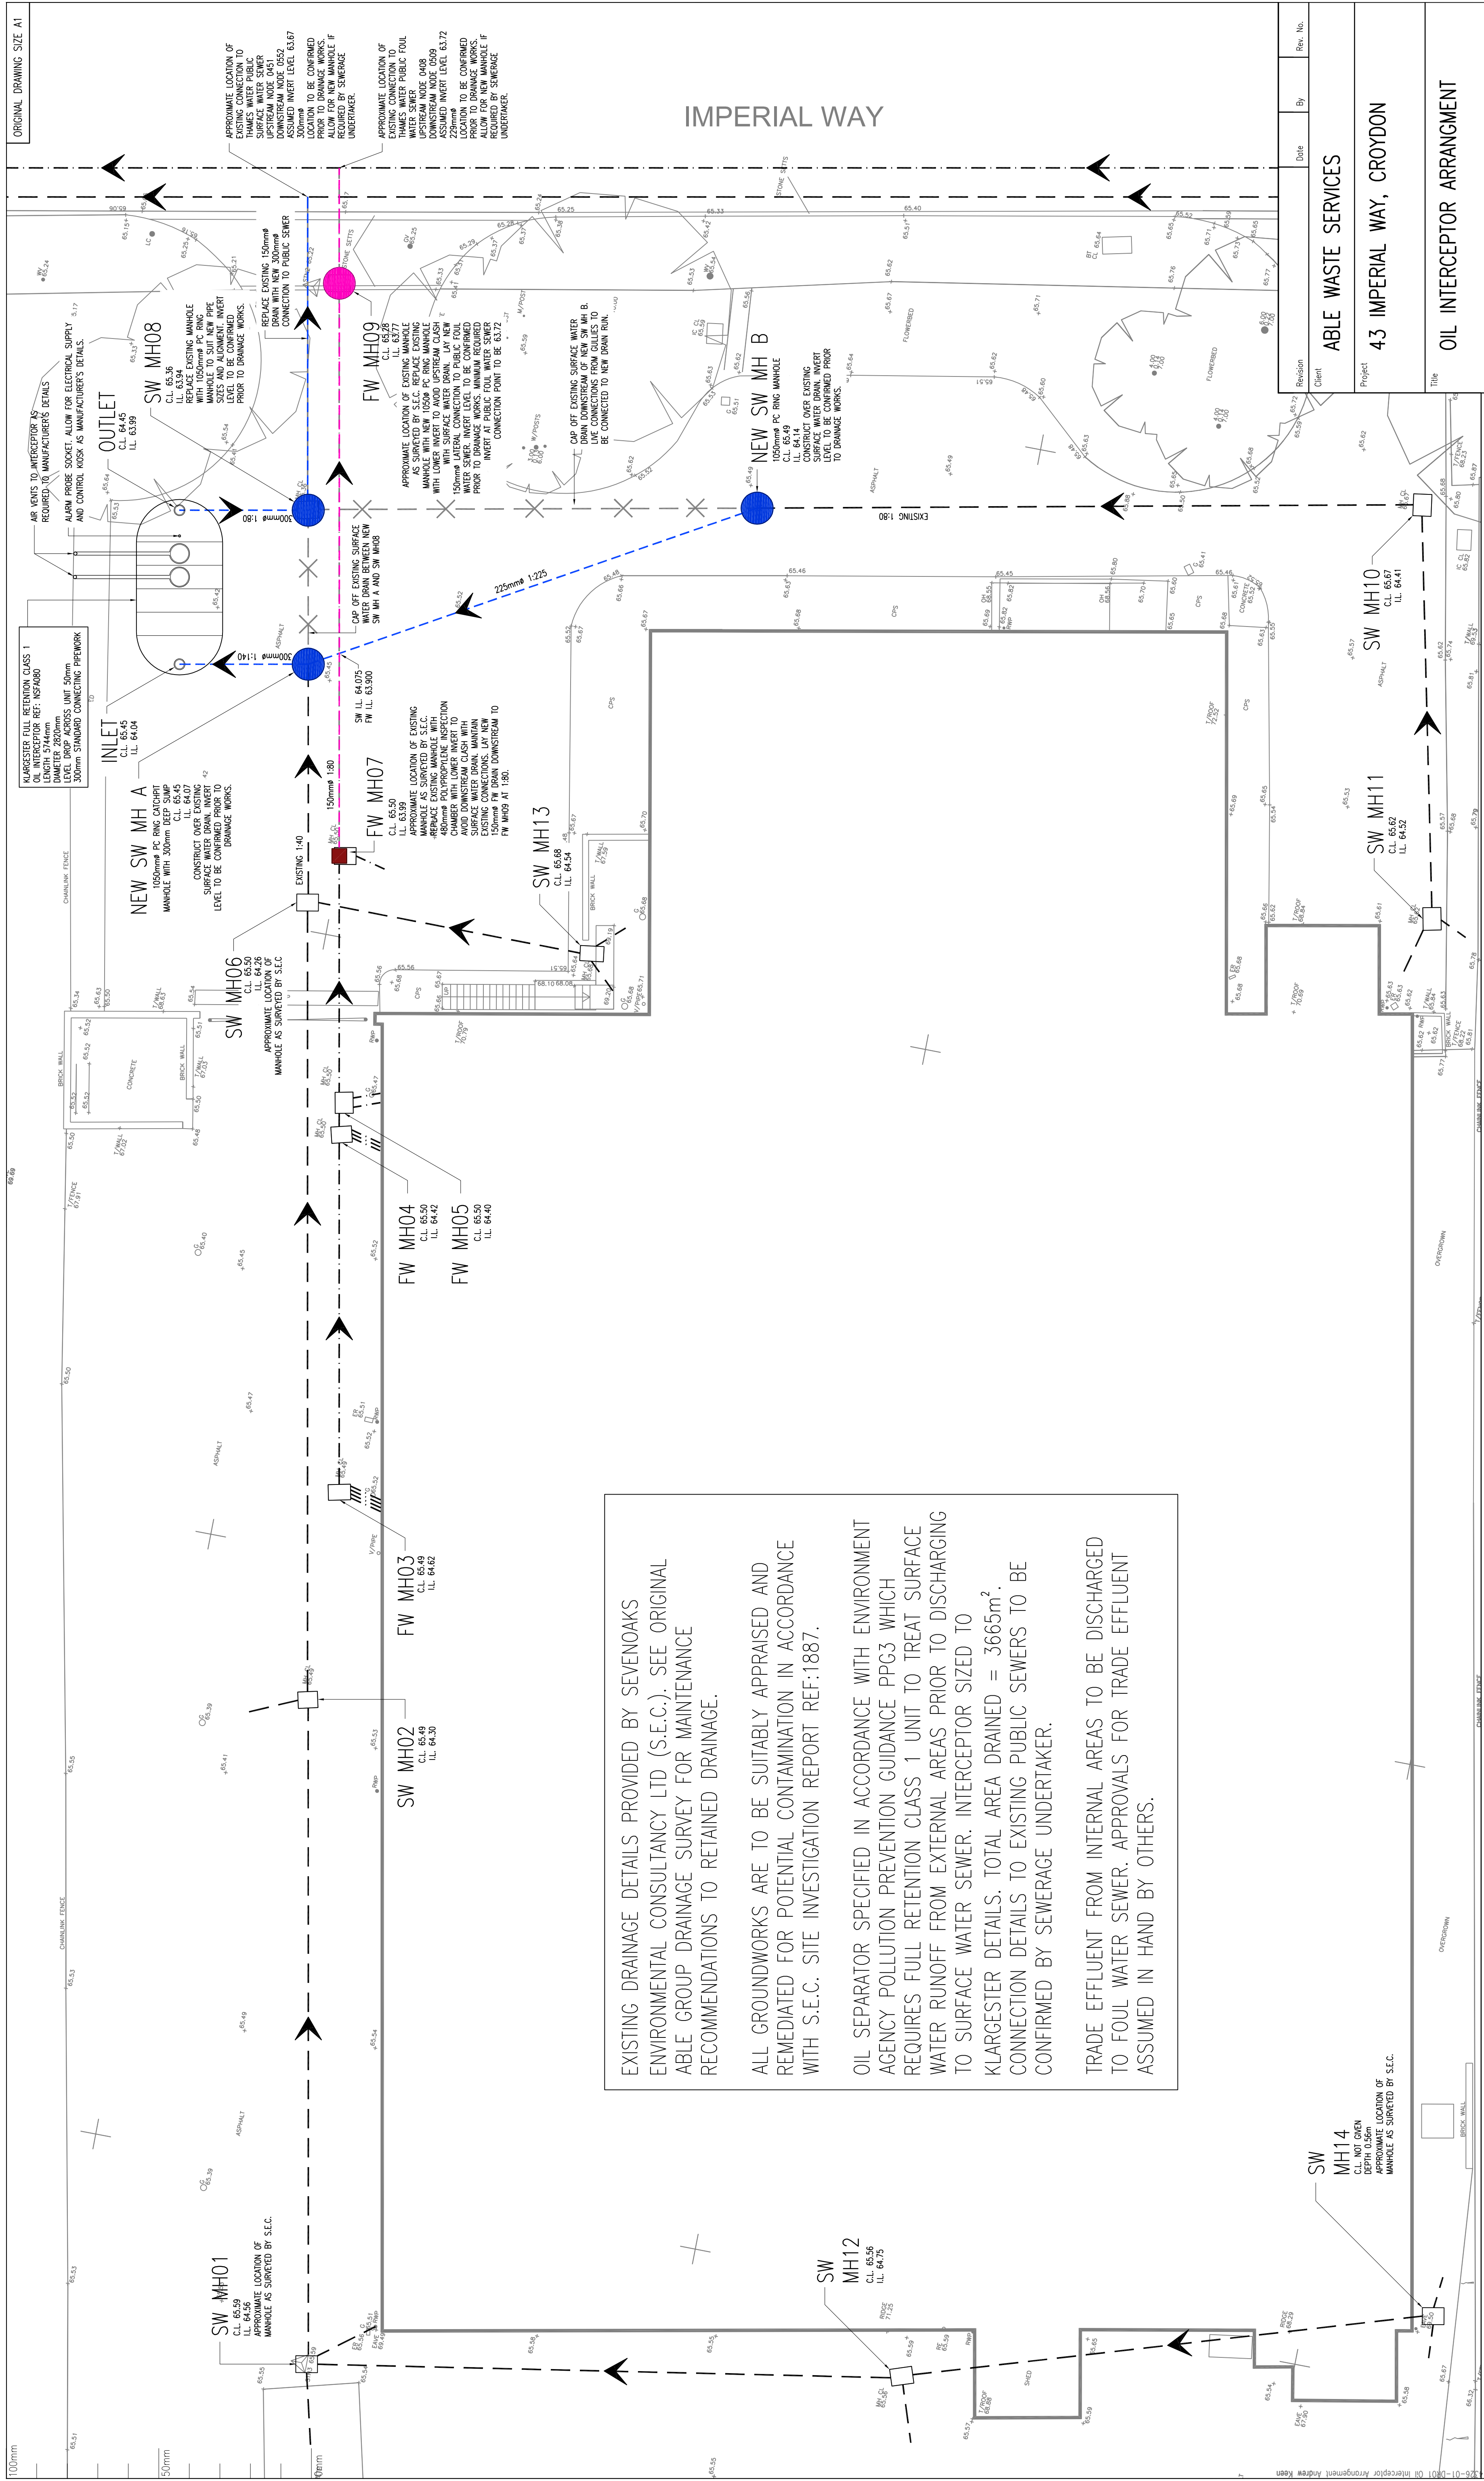

Revision	Date	By	Rev. No.
ABLE WASTE SERVICES			
43 IMPERIAL WAY, CROYDON			
Project			
OIL INTERCEPTOR ARRANGMENT			
Title			

HOP

HEMSLEY ORRELL PARTNERSHIP
CONSULTING CIVIL & STRUCTURAL ENGINEERS
LONDON BRANCH OFFICE

Tel : +44 (0)1723 22900 Fax : +44 (0)1723 326767
E-Mail : engineershop.co.uk.com
www.hop-uk.com

Scales1:100DateMAY 2014DrawnAKEENCheckedAKEENGApprovedHOP ContactAKEENRev. No.—Project No.14326Task No.01Dwg. No.DR01

LEGEND	
FUUL WATER	SURFACE WATER
- - - — — — X X X	NBRAIN EXISTING DRAIN REDUNDANT DRAIN
(pink circle) (red square)	NEW PC RINC MANHOLE NEW POLYPROPYLENE INSPECTION CHAMBER

INDICATIVE ONLY

3N

Scale
0 1m 2m 3m 4m 5m
1:100

NOTES.

GENERAL

- This drawing is not to be scaled, work to figured dimensions only, confirmed on site.
- This drawing is to be read in conjunction with all relevant architectural drawings, detailed specifications where applicable and all associated drawings in this series.
- Any discrepancy on this drawing is to be reported immediately to the partnership for clarification.
- The contractor is responsible for all temporary works and for the stability of the works in progress.

2. BELOW GROUND DRAINAGE

- Pipework to be UPVC-U pipes to BS 4660 ; 200mm and inspection Chambers to BS 7158 ; 200l.
- All adoptable drainage to be constructed in accordance with "Sewers for Adoption" 7th Edition and the relevant Council Design Guide.
- All private surface water sewers to be laid at l in 80 unless otherwise stated on the drawing.
- All private foul water sewers to be laid at l in 40 at the head of pipe runs and l in 80 elsewhere unless otherwise stated.
- All private foul sewer pipes to be 100mm diameter unless otherwise stated on the drawing. All private surface water sewer pipes to be 100mm diameter from downpipes and 150mm diameter elsewhere unless otherwise stated on the drawing.

ALLOW FOR RODDING ACCESS ABOVE GROUND WHERE RAINWATER DOWNPIPES DO NOT HAVE A DIRECT CONNECTION TO AN INSPECTION CHAMBER.

- Existing sewer pipe to be re-used to be surveyed and levelled prior to commencement of the drainage works and refurbished if necessary.
- Connections to an adopted sewer only to be made following approval from the relevant adopting Authority.
- All drains, sewer pipes and manholes to be cleaned and tested for water tightness on completion of construction.