Application for an environmental permit Part B6:

- 1. New bespoke water discharge activity
- 2. New bespoke groundwater activity (point source discharge)
- 3. Point source emission to water from an installation.



You will need to use an Adobe reader product to complete this form. The form may not work properly if you use a different pdf reader, such as the one built-in to your internet browser.

This application is for a bespoke water discharge activity or groundwater point source discharge activity environmental permit. Check https://www.gov.uk/guidance/discharges-to-surface-water-and-groundwater-environmental-permits to ensure that you need a permit and the type of permit you need.

You should also complete this form if you are applying for a bespoke installation activity that includes a point source emission to water, groundwater or sewer.

Fill in this part of the form, together with parts A, B2 and F1, https://www.gov.uk/government/collections/environmental-permit-application-forms-for-a-new-bespoke-permit if you are applying for a new bespoke permit for a water discharge activity or a point source discharge groundwater activity. You need to fill in part B6, including any relevant appendices, once for each effluent you are applying for.

Fill in this part of the form, together with parts A, B2, B3 and F1, https://www.gov.uk/government/collections/environmental-permit-application-forms-for-a-new-bespoke-permit if you are applying for a new bespoke permit for an installation where a point source emission to water, groundwater or sewer forms part of the operation.

If you want to apply for a standalone discharge of treated domestic sewage effluent of up to fifteen cubic metres (15 m³) a day to ground or up to twenty cubic metres (20 m³) a day to surface water, please fill in form B6.5.

If you want to apply for an environmental permit for a ground source or surface water source heating and cooling scheme fill out forms A, B8 and F1. https://www.gov.uk/government/publications/ new-ground-source-heating-and-cooling-scheme-form-and-guidance-notes

You may also need to complete this form if you have a point source emission to water from a waste operation. For further information see https://www.gov.uk/guidance/discharges-to-surface-water-and-groundwater-environmental-permits

Please check that this is the latest version of the form available from our website.

Grey boxes indicate the guidance notes to help you complete the form. The form can be:

- saved onto a computer and then filled in.
- 2) printed off and filled in by hand. Please write clearly in the answer spaces.

We anticipate it will take less than three hours to fill in this part of the application form if you have all the necessary information available.

EPB6 Version 13, June 2024 Page 1 of 65

Contents About the effluent – details and type About the effluent – how long will you need to discharge the effluent for? How much do you want to discharge? Intermittent sewage discharges Should your discharge be made to the foul sewer? **Nutrient neutral** How will the effluent be treated? What will be in the effluent? **Environmental risk assessments and modelling Monitoring arrangements** Where will the effluent discharge to? How to contact us **Sections:** Discharges to tidal river, tidal stream, estuary or coastal waters Discharges to non-tidal river, stream, ditch or canal Discharges to a lake or pond Preliminary questions for discharges to ground Discharges to a British Standard drainage field or drainage mound Discharges to ground NOT using a British Standard drainage field or drainage mound Discharges onto land via grass plot

EPB6 Version 13, June 2024 Page 2 of 65

1 About the effluent – details and type

From the list below, tick the box for the type of effluent you are applying for on this form and answer the questions shown in that row in Table 1. You must fill in a separate copy of this form and the appropriate section or sections for each effluent you plan to discharge. For mixed effluents which share treatment and have a common monitoring point, for example sewage treated with trade and/or non-sewage, choose the type of effluent which makes up the highest volume of the discharge.

Table 1 - About the effluent

Type of effluent	Charge band	Tick box	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11
	1.3.3 Sewage effluent discharge with a volume up to and including 5m³ a day to surface water from domestic household or organisation operating for charitable purposes		All	All	b, f	-	All	All	All	-	\ '	b, j, k	All
Treated	1.3.4 Sewage effluent discharge with a volume up to and including 5m³/day to groundwater from domestic household or organisation operating for charitable purposes		All	All	b, f		All	All	All	-	ı	b, j, k	All
sewage effluent (non-water company)	1.3.5 Sewage effluent discharge with a volume up to and including 5 m³ a day to surface water		All	All	b, f	-	All	All	All	-	-	b, j, k	All
company)	1.3.6 Sewage effluent discharge with a volume up to and including 5m³/day to groundwater		All	All	b, f	-	All	All	All	-	-	b, j, k	All
	1.3.7 Sewage effluent discharge with a volume greater than 5m³/day up to and including 15m³/day to groundwater		All	All	b, f	-	All	All	All	b, c, d	-	b, j, k	All
	1.3.8 Sewage effluent discharge with a volume greater than 15m³/day to groundwater		All	All	b, f	-	All	All	All	b, c, d	d, f	a, b, c, d, e, f, j, k	All

EPB6 Version 13, June 2024 Page 3 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Type of effluent	Charge band	Tick box	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11
Treated sewage effluent (non-water company)	1.3.9 Sewage effluent discharge with a volume greater than 5m³/day up to and including 50m³/day to surface water		All	All	b, f	-	All	All	All	b, c, d	a or b, f	b, j, k	All
	1.3.10 Sewage effluent discharge with a volume greater than 50m³/day to surface water		All	All	b, f	-	All	All	All	b, c, d	a or b, f	a, b, c, d, e, f, j, k	All
	1.3.5 Sewage effluent discharge with a volume up to and including 5m³/day to surface water		All	a, b, e	a, f (b is optional)	-		All	All	a, b, c, d	c, f	a, b, c, f, j, k	All
	1.3.6 Sewage effluent discharge with a volume up to and including 5m³/day to groundwater		All	a, b, e	a, f (b is optional)	-	-	All	All	a, b, c, d	c, f	a, b, c, f, j, k	All
Water company WwTW treated	1.3.7 Sewage effluent discharge with a volume greater than 5m³/day up to and including 15m³/day to groundwater		All	a, b, e	a, f (b is optional)	-	-	All	All	a, b, c, d	c, f	a, b, c, f, j, k	All
sewage effluent	1.3.8 Sewage effluent discharge with a volume greater than 15m³/day to groundwater		All	a, b, e	a, f (b is optional)	-	-	All	All	a, b, c, d	c, d, f	a, b, c, d, e, f, j, k	All
	1.3.9 Sewage effluent discharge with a volume greater than 5m³/day up to and including 50m³/day to surface water		All	a, b, e	a, f (b is optional)	-	-	All	All	a, b, c, d	b if relevant, c, f	a, b, c, f, j, k	All
	1.3.10 Sewage effluent discharge with a volume greater than 50m³/day to surface water		All	a, b, e	a, f (b is optional)	-	-	All	All	a, b, c, d	b if relevant, c, f	a, b, c, d, e, f, j, k	All

EPB6 Version 13, June 2024 Page 4 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Type of effluent	Charge band	Tick box	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11
Settled storm sewage	1.3.18 Sewerage network and sewage treatment works storm sewage		All	a, b, e		a, b, c, d, f, g, h, i, j, k			All		c, f	b, g, h, I, j, k	All
Storm sewage	1.3.18 Sewerage network and sewage treatment works storm sewage		All	a, b, e	-	a, b, c, e, f, g, h, i, j, k	-	-	All	-	c, f	b, g, j, k	All
Emergency overflow	1.3.19 Emergency overflows		All	a, b, e	-	a, l, m, n, o	-	-	All	-	c, f	b, g, j, k	All
Trade and/or non-sewage	1.3.11 Trade and/or non-sewage effluent discharge to surface water or groundwater with a volume up to and including 5m³/day		All	All	b, c, f	-	All	All	All	b, c, d	a, b or d	b, f, j, k	All
– known volume	1.3.12 Trade and/or non-sewage effluent discharge to surface water or groundwater with a volume greater than 5m³/day		All	All	b, c, f		All	All	All	b, c, d	a, b or d,	b, d, e, f, j, k	All
Trade and/or non-sewage –rainfall dependent	1.3.11 Trade and/or non-sewage effluent discharge to surface water or groundwater with a volume up to and including 5m³/day		All	a, b, e	b, c, d, e, f	-	-	All	All	b, c, d	a, b or d, f	b, f, j, k	All
	1.3.12 Trade and/or non-sewage effluent discharge to surface water or groundwater with a volume greater than 5m³/day		All	a, b, e	b, c, d, e, f	-	-	All	All	b, c, d	a, b or d, f	b, d, e, f, j, k	All

EPB6 Version 13, June 2024 Page 5 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Type of effluent	Charge band	Tick box	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11
Cooling water or thermal discharge (includes heating and cooling systems)	1.3.13 Cooling water or thermal discharge to surface water		All	All	b, c, f			_All	All	b, c, d, e, f	a, b or d, f	a, b, d, e, f, j, k	All
	1.3.14 Cooling water or thermal discharge to groundwater		Att	All	b, c, f	-	-	All	All	b, c, d, e, f	a, b or d, f	a, b, d, e, f, j, k	All
Aquaculture	1.3.17 Aquaculture		All	All	b, c, f	-	-	All	All	b, c, d	a, b or d, f	a, b, d, e, f, j, k	All
Effluent and/or contaminated surface water run-off arising from the operation of an installation	permit application charge		a, b, d	С	b, c, d, f	-	a, b2	All	a, b, g	b, c, d, e, f	e, f	a, b, d, e, f, j, k	All

EPB6 Version 13, June 2024 Page 6 of 65

1a Give a brief description of the discharge you want a permit for, for example, the nature of the trade carried on at the premises, or for a discharge of treated domestic sewage effluent, which premises are connected to the sewage treatment plant.

Domestic sewage is explained at: https://www.gov.uk/government/publications/domestic-sewagedischarges-to-surface-water-and-groundwater/domestic-sewage-discharges-to-surface-water-andgroundwater

Where the discharge is from a sewage treatment plant operated by a water company and serving an 'agglomeration' you must tell us the name of the agglomeration and the population equivalent served by the treatment plant. (An agglomeration is where a population is sufficiently concentrated for urban waste water to be collected and treated in an urban waste water treatment plant).

1b Give this effluent a unique name.

You must use this reference to identify this effluent throughout this application and all associated documents. For example 'treated sewage effluent' or 'trade effluent'.

1c Is this a release from a dam, weir or sluice ('reservoir release') under Schedule 21 of the Environmental Permitting Regulations (EPR) meaning of water discharge activity?

Yes

No

1d Have you obtained all the necessary permissions to ensure that you can undertake the proposed discharge and comply with monitoring requirements?

For example, the permission from landowners for pipework to cross their land, or to have a sampling point on their land, or the Canal and Rivers Trust if you want to discharge into a canal that they manage. Please note that this is not an exhaustive list. Please be aware that if you do not have all the necessary permissions you will not be discharging lawfully. Explained at: https://www.gov.uk/ guidance/discharges-to-surface-water-and-groundwater-environmental-permits#apply-for-a**bespoke-permit**. Where permission has not been granted, you should also seek alternative options before applying.

Yes

No

Does not apply

Explain which permissions you have not been able to get and why in the following box or on an extra sheet.

EPB6 Version 13, June 2024 Page 7 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation								
inission to water or sewer from	an mstattation							
Oocument reference $ldsymbol{\sqcup}$								

EPB6 Version 13, June 2024 Page 8 of 65

2 About the effluent – how long will you need to discharge the effluent for?

2 About the entuent –	now long will you need to	discharge the entuent for:
2a What date do you want the p	ermit for this effluent to start?	
As soon as possible		
Other date		
Provide the date	(DD/MM/YYYY)	
started to discharge, unless yo start date use the Administrativ	u contact us to change or delay the	The start date cannot be before the
2b Is the discharge temporary?		
No		
Yes		
Provide the date you expect the	discharge to end:	(DD/MM/YYYY)
	Hnot end on that date, and you wi https://www.gov.uk/guidance/ch surrender-your-permit.	
2c Will the discharge take place	all year?	
Yes		
No		
Provide details of the dates whe October 31st.	າ your discharge will start and end	each year, for example, April 1st to
2d Will the discharge take place	e on more than six days in any year	?
Yes		
No		
2e Is this application to permit	an existing discharge?	
of the treatment system needs	g for an existing discharge that doe replacing or upgrading. Please not considered to be within a reasona eady in place.	e for recent installations, a permit
Yes		
No	-	

EPB6 Version 13, June 2024 Page 9 of 65

3 How much do you want to discharge?		
3a What is the daily dry weather flow?	cubic metres	
Read 'Calculating dry weather flow (DWF) at waste was government/publications/calculating-dry-weather-flow-dwf-at-waste-water-trecalculated.	ow-dwf-at-waste-water-tre	atment-works/
3b What is the maximum volume of effluent you will disch	arge in a day?	cubic metres
You must ensure that you choose a volume you can all discharges and some trade effluent discharges you mand loads 4' to calculate your maximum daily flow. Flocapacity for sewage treatment systems at		

EPB6 Version 13, June 2024 Page 10 of 65

In a discharge containing rainfall dependent effluent, this will be the maximum total daily volume of any non-rainfall-dependent element.

Show how you calculated the figure given in the box below and continue on an extra sheet if necessary.

Document reference

In a discharge containing rainfall dependent discharge?

In a discharge containing rainfall dependent effluent, this will typically be based on the 1-in-30-year storm event.

Show how you calculated the figure given in the box below and continue on an extra sheet if necessary.

Document reference

EPB6 Version 13, June 2024 Page 11 of 65

4 Intermittent sewage discharges

Further guidance can be found in 'Water companies: environmental permits for storm overflows and emergency overflows permits' at https://www.gov.uk/government/publications/water-companies-environmental-permits-for-storm-overflows-and-emergency-overflows.

4a For each answer to 4b to 4n below, show how you worked out all th	e figures on an extra sheet
Document reference 4b	
Document reference 4c	
Document reference 4d L	
Document reference 4e L	l
Document reference 4g	I
Document reference 4h	I
Document reference 4i	
Document reference 4j	
Document reference 4k	
Document reference 41	
Document reference 4m L	Т
Document reference 4n	I
4b What is the total volume of the off-line/storm tank storage?	cubic metres
4c What is the total volume of on-line storage? Landscale	oic metres
4d What is the pass forward flow at the settled storm overflow setting	7
litres a second	
4e What is the pass forward flow at the storm overflow setting?	litres a second
4f Is the discharge screened?	
Yes Answer the relevant questions from 4g to 4j No Now go to 4k	
/ NO NOW 50 to TK	

EPB6 Version 13, June 2024 Page 12 of 65

4g and 4i. If your effluent is screened answer 4g for a mesh screen, 4i for a bar screen, or 4g and 4i for a split screen.

4h and 4j. If your effluent is screened provide the maximum flow receiving screening. For split screens provide details of the maximum flow receiving the mesh screening as well as the maximum flow receiving bar screening. (The maximum flow receiving screening may also be described as the minimum screen capacity flow).

EPB6 Version 13, June 2024 Page 13 of 65

5 Should your discharge be made to the foul sewer?

Before answering these questions, you must read the guidance https://www.gov.uk/guidance/ discharges-to-surface-water-and-groundwater-environmental-permits#discharges-in-sewered-areas

Foul sewer means public or private foul sewer. You will also need to contact your sewerage undertaker (usually your local water company) and you may need to check if it is possible to connect to a private foul sewer.

treatment facility, or an or private sewer.		•	, ,		, .	
met	res					
National grid reference	(NGR) for the near	est sewer sys	tem.			
NGR						
Use 2 letters and 10 dig on https://explore.osm	•	ST 12345 678	90. To find out	the natio	onal grid refe	rence search
5b1 Discharges from d	omestic properties	5			_	
Provide the number of o	lomestic propertie	s served by th	e sewage treat	ment sys	stem.	
Multiply the number of	properties served	by the sewage	treatment sys	tem by 3	0 metres.	
Number of domestic properties served by the sewage treatment system metres		× 30) metres =			metres
5b2 Discharges from a	ll other premises i	ncluding trad	e effluent			
Divide the volume of the	e discharge (in cub	ic metres) by	0.75 and then	multiply	this figure b	y 30 metres.
Volume of the discharge (answer to question 3b)	cub met =	ric tres÷0.75		× 30 =		metres

5b3 Is your answer to question 5b1 or 5b2 above greater than the distance to the nearest foul sewer (answer to 5a)?

No You do not need to explain why you cannot discharge your effluent into the foul sewer at this point. However, we may in some cases still request this information from you when we determine your application if this information is subsequently required. **Now go to question 6.**

EPB6 Version 13, June 2024 Page 14 of 65

Form EPB: Application for an environmental permit –	Part B6 water discharge activity or	r groundwater (point source)	activity, or point source
emission to water or sewer from an installation			

emission to	water or sewer from an installation
Yes	Before you submit the application, you must explore the possibility of connecting to the foul sewer. Then, you must explain why you cannot discharge your effluent into the foul sewer in the following box or an extra sheet.
Docume	nt reference
	only agree to the use of private treatment systems within sewered areas if you can strate that:
	ection is not practically feasible, or
	proposed private treatment system can be shown to significantly benefit the environment.
5c Is the	e sewer nearby a public or private one?
	ist provide details of the nearest sewer including evidence that you have approached the ge undertaker and their formal response regarding connection.
Publ	ic Where you could connect to the foul sewer through a public foul sewer, you must send us evidence that you have approached the sewerage undertaker and their formal response regarding connection.
Tick	this box to confirm you have included this information with your application.
Doeume	nt reference
you she in circu neares enhane before	ewerage undertaker has indicated that they would not allow connection due to lack of capacity ould contact us. We are unlikely to grant a permit for a discharge of treated domestic sewage imstances where a private sewerage system is being proposed due to a lack of capacity in the topublic sewerage network. Before proceeding with your application, you can apply for our seed pre-application advice. This is a chargeable service. For more information see Get advice you apply for an environmental permit: https://www.gov.uk/guidance/get-advice-before-ply-for-an-environmental-permit .
	ve already had enhanced pre-application for this proposal provide the reference number for anced pre-application.
Pre-appl	ication reference number:
Docume	nt reference for enhanced pre-application advice:
Priva	te Where you could connect to the foul sewer through a private sewer, you must send us evidence to show that you have requested to connect to the private sewer. Written responses from the owners of the private sewer must be provided.

EPB6 Version 13, June 2024 Page 15 of 65

Tick this box to confirm you have included this information with your application on an extra sheet.
Document reference
5d Is the existing system a factor in your justification for not connecting to the public foul sewer?
If you are applying for an existing discharge, that does not have a permit and no part of the treatment system needs replacing or upgrading, you may give this as a reason for not connecting to a nearby sewer. However, you must provide the date the treatment system was installed as accurately as you can. Please note that for new systems that have been recently installed or systems that have been recently replaced or upgraded a permit will not be granted if the site is considered to be within a reasonable distance to connect to a foul sewer (even if the system is already in place).
No Yes What date was the system installed?
5e Is cost a factor in your justification for not connection to public or private foul sewer?
If you have answered 'yes' to 5b3, you need to show the difference between the cost of connection to the foul sewer and that of your proposed private treatment system. This applies to new discharges, or existing discharges where you are proposing to replace or upgrade any part of your existing treatment system.
No Yes You must provide evidence of the extra east of connecting to a sewer compared to the treatment system you propose.
Document reference
Please note that if we consider that you have not provided enough justification, we will return your application to you.
Foul sewer connection costs:
Cost of sewer pipe and infrastructure, for example, gravity sewer, pipework, manholes, or rising main and pumping.
<u>f</u>
Pumping equipment, pump and sump pump, if necessary. Maintenance or running costs of these if they are not adopted by the sewerage undertaker.
$\underline{\mathbf{f}}$
Installation: Digging up of roadside verges, roads or land on route to the sewer and making good.
<u>f</u>
Road closure costs, if necessary.
\mathbf{f}

EPB6 Version 13, June 2024 Page 16 of 65

Legal easements to cross land, cost of land purchase, if necessary.			
<u>f</u>			
Initial connection charges from the sewerage undertaker.			
<u>f</u>			
Cost of maintenance and upkeep.			
<u>£</u>			
The sewerage undertaker will expect any pipe work connecting to their system to be constructed to adoptable standards or to the specification of the latest edition of 'Sewers for Adoption – A Design & Construction Guide for Developers'.			
Other: Provide details on an extra sheet			
\mathbf{f}			
Document reference			
Total cost to foul sewer: <u>f</u>			
Proposed treatment system costs			
Cost of treatment system, pipe work and other materials.			
<u>£</u>			
Pumping equipment, if necessary.			
<u>f</u>			
Installation including excavation and digging up of roadside verges, roads or land on route to the treatment system, making good and commissioning.			
Road closure costs, if necessary.			
Legal easements to cross land, cost of land purchase, if necessary.			
<u>£</u>			
Maintenance and running costs.			
<u>f</u>			
Other – Provide details on an extra sheet.			
LÉ			
Document reference			
Total cost of proposed treatment system: If			

EPB6 Version 13, June 2024 Page 17 of 65

5f Are you using physical or technical barriers as a factor in your justification for not connecting to public or private foul sewer? No			
Yes You must provide justification			
Your justification should include details of any physical obstacles that may impede connection to the foul sewer, for example, topography, roads, railways, designated habitats sites, rivers or canals. Please be aware that we may require cost estimates to be provided to prove that it is not viable for these physical obstacles to be overcome. Provide justification on an extra sheet.			
Document reference			
5g Are you proposing that the private treatment system can be shown to significantly benefit the environment as the justification for not connecting to public or private foul sewer?			
No			
Yes			
To prove significant environmental benefit, you must answer the following:			
Have you provided evidence that the effluent will be treated to a higher standard than if connected to foul sewer? Provide a justification on an extra sheet.			
No			
Yes			
Document reference			
Have you shown that the additional environmental benefits from your proposed system would outweigh the potential environmental risks from a private system at the location proposed? Provide justification on an extra sheet.			
No			
Yes			
Document reference			
When assessing this, we consider the nature of the environmental risks that would be associated with non-compliance of your proposed system. Before proceeding with your application, you can apply for our enhanced pre-application advice. This is a chargeable service. For more information see Get advice before you apply for an environmental permit: https://www.gov.uk/guidance/get-advice-before-you-apply-for-an-environmental-permit .			

EPB6 Version 13, June 2024 Page 18 of 65

6 Nutrient neutral

Check Natural England's page to find out if you are within a nutrient neutral catchment: https://publications.naturalengland.org.uk/publication/4792131352002560. To find a list of vulnerable sites download the records file on this page.

If you are in a nutrient neutral catchment and you are contributing to a net increase of nutrient loading (meaning phosphorus and/or nitrogen) through a new discharge, you will be required to have appropriate mitigation in place.

6a	Are you in a nutrient neutral catchment?		
	No	Now go to question 7.	
	Yes		
Wh	at is tl	ne name of the nutrient neutral catchment?	
6b	6b Is this permit for a new discharge?		
	No	Now go to question 6c.	
	Yes		
	•	oe required to have appropriate mitigation in place? Contact your local planning authority /or Natural England to discuss appropriate mitigation in your area.	
	No	Provide justification of why you do not need to have appropriate mitigation in place in the following box or an extra sheet.	
Ref	erence	e for the extra sheet.	
	Yes	If you have your mitigation plan in place, provide this with your application	
Do	cumen	t reference.	
Nov	w go to	question 7	
6с	Is this	permit for an existing discharge?	
	Yes		
Has	s the lo	ocation of the discharge point or volume of the discharge changed?	
	No	Now go to question 7.	
	Yes		

EPB6 Version 13, June 2024 Page 19 of 65

Will you be required to have appropriate mitigation in place? Contact your local planning authority (LPA) and/or Natural England to discuss appropriate mitigation in your area.			
No	Provide justification of why your discharge will not result in a net increase of nutrient loading (meaning phosphorus and/or nitrogen) in the following box or an extra sheet.		
Reference	e for the extra sheet.		
Yes	If you have your mitigation plan in place, provide this with your application.		
Documen	t reference.		
If you hav	ve completed independent third-party testing that meets British Standard BS12566, provide ficate.		
Reference	e for this certificate		

EPB6 Version 13, June 2024 Page 20 of 65

7 How will the effluent be treated?

7a Is your effluent treated?

•	,	_	-
١	,	Δ	c
	ш	τ.	

No You must explain why the effluent will not be treated.

Document reference for where you have given this justification.

7b	Fill in Table 2 for each stage of the treatments carried out on your effluent in the order in which they
are	e carried out.

For installations and waste applications with point source emission to water or sewer **complete all relevant parts of question 8**, there is no need to duplicate information already provided in part B3 or Part B4 forms. Where this information is already provided, give the document reference.

_		
1100011	ment reference L	
1 16 16 11		
Ducu		

Table 2 - Treatments carried out on your effluent

Description	Order of treatment (for example first, second, third, fourth)	
package treatment plant		Now go to 7d
septic tank		Now go to 7d
septic tank with internal septic tank retrofit kit		Now go to 7d
septic tank and sequential batch reactor		Now go to 7d
septic tank and rotating biological contactor		Now go to 7d
septic tank and reedbed		Now go to 7d
trench arch system		Now go to 7d
biological filtration		Now go to 7g
high rate biological		Now go to 7g
tertiary biological		Now go to 7g
chemical		Now go to 7g
activated carbon		Now go to 7g

EPB6 Version 13, June 2024 Page 21 of 65

Description	Order of treatment (for example first, second, third, fourth)	
sand filtration		Now go to 7g
activated sludge		Now go to 7g
oxidation ditch		Now go to 7g
dosing using aluminium for phosphate removal		Now go to 7g
dosing using iron for phosphate removal		Now go to 7g
dosing using iron and aluminium for phosphate removal		Now go to 7g
dosing using polyelectrolytes		Now go to 7g
primary settlement		Now go to 7g
screening		Now go to 7g
maceration		Now go to 7g
no treatment required – good engineering design		Now go to 7g
lagoon settlement		Now go to 7g
oil interceptor		Now go to 7g
chlorination		Now go to 7g
dechlorination		Now go to 7g
ph correction		Now go to 7g
UV disinfection		Now go to 7g
membrane filtration		Now go to 7g
sterilisation		Now go to 7g
land irrigation		Now go to 7g

EPB6 Version 13, June 2024 Page 22 of 65

Description	Order of treatment (for example first, second, third, fourth)	
reedbed		Now go to 7g
constructed wetland		Now go to 7g
Other		Now go to 7c

Other	Now go to 7c
7c Provide design details of this oth effluent, in the following box or an ex	atment carried out on your
Docume nt ref erence L	

7d For existing sewage treatment systems, did the treatment system meet the relevant British Standards at the time of installation?

Yes Now go to 7g.

No **Now go to 7e.**

How to check if your treatment system meets the British Standard is explained at https://www.gov.uk/guidance/general-binding-rules-small-sewage-discharge-to-a-surface-water.

Your septic tank or treatment plant met the British Standard in place at the time of installation if:

- it has a CE mark https://www.gov.uk/guidance/ce-marking
- the manual or other documentation that came with your tank or treatment plant has a certificate of compliance with a British Standard
- it's on British Water's list of approved equipment https://www.britishwater.co.uk/page/ Accreditation-Certificationcertified-small-wastewater-treatment-systems-for-up-to-50-pt

You can also ask the company that installed your equipment to confirm that it met the British Standard in place at the time of installation.

7e Provide justification as to why you a an extra sheet.	are not using a British Standard system in the following box or

EPB6 Version 13, June 2024 Page 23 of 65

Document reference
7f Will the secondary treatment system you are applying for be designed, maintained and operated to deliver the required final effluent quality?
For discharges to surface water, you must confirm whether the treatment system will provide secondary treatment. As a minimum this requires a final effluent quality of 40 mg/l BOD (Biochemical Oxygen Demand) and 60mg/l suspended solids (or better) as maximum concentrations.
Yes No What is the secondary treatment system you are applying for designed to deliver for BOD as a maximum concentration?
What is the secondary treatment system you are applying for designed to deliver for suspended solids as a maximum concentration?
∟ mg/l
7g You must provide details on an extra sheet of the final effluent discharge quality that the overall treatment system is designed to achieve.
Document reference

EPB6 Version 13, June 2024 Page 24 of 65

8 What will be in the effluent?

For all applications, whether to surface water, or onto or into ground, you should still check to see if your discharge is likely to contain any of the specific substances listed in the guidance documents on 'Risk assessment for treated sewage or trade effluent discharges to surface water or groundwater'

(see https://www.gov.uk/guidance/risk-assessments-for-your-environmental-permit).

If you answer 'yes' to any of 8a to 8c, the discharge contains, or potentially contains, specific substances, you must answer question 9 and send us the screening or modelling and data.

Specific substances means:

For a groundwater activity:

- hazardous substances (as defined by paragraph 4 of Schedule 22 to the Regulations)
- non-hazardous pollutants (as defined by paragraph 5 of Schedule 22 to the Regulations)

This does not include discharges that only contain, or are only likely to contain as their primary pollutants, ammoniacal nitrogen or ammonium and suspended solids.

You can find a list of these substances at https://www.wfduk.org/resources/groundwater-hazardous-substances-standards

For a surface water discharge activity:

- · priority hazardous substances
- priority substances or other pollutants as defined by the Environmental Quality Standards Directive (EQSD) (2008/105/EC, as amended by 2013/39/EU)
- specific pollutants as defined by Annex 8 of the Water Framework Directive (2000/60/EC) and transposed into UK legislation through the Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015
- or any other substances which the Agency requires assessment because of their bioaccumulative, toxic or ecotoxicological properties
- or any other properties which the Agency considers to present a risk to the aquatic environment

You can find a list of these substances at: https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit

Answer all relevant questions for your discharge below.

8a	Are any of the specific substances, as defined in the above guidance, entering your	upstream
sev	verage network through any authorised trade consents or known inputs?	

Yes	Complete this question and ensure you complete	ete the relevant parts of question 9.
	You will need to complete a risk assessment.	

No Provide details on an extra sheet of how you have established that the effluent is not likely to contain specific substances.

Document reference		Л
Does not apply	Jam not a commercial site treating effluent and	d do not provide treatment for other
	effluent streams.	

EPB6 Version 13, June 2024 Page 25 of 65

8b	Are any of the specific substances,	, as defined in	the above guida	ance, added to or	present in the
effl	uent as a result of the activities on	site?			

Yes Complete all remaining relevant parts of questions 8 and ensure you complete the relevant parts of question 9. You will need to complete a risk assessment.

No Provide details on a separate sheet of how you have established that the effluent is not likely to contain specific substances.

8c Have any of the specific substances, as defined in the above guidance, been detected in samples of effluent?			
Yes	Complete all remaining relevant questions in section 8 and ensure you complete the relevant parts of question 9. You will need to complete a risk assessment.		
No	Provide details on an extra sheet of how you have established that the effluent is not likely to contain specific substances.		
Documer	t reference		
•	have answered 'No' to any of questions 8a to 8c provide details of the evidence you have d, include data of all substances assessed, whether or not they require to be taken forward to		
	9.		
	ote that if you discharge directly into a designated conservation site, we will consult with ngland which may result in the requirement for further modelling which you may be required		
Natural E to carry o	ote that if you discharge directly into a designated conservation site, we will consult with ngland which may result in the requirement for further modelling which you may be required		

Document reference _____

Complete 8e and 8f if the temperature of the discharge will change compared to an incoming water supply. Then, if you have answered yes to any of questions 8a-8c, you must answer at least one of the questions in 9.

8e What is the maximum temperature of your discharge?		
∟ degrees Celsius	Temperature limit as defined in trade effluent consent	
8f What is the maximum expected temperature change of the incoming water supply?		

increase in degrees Celsius _____

decrease in degrees Celsius _____

Document reference ∟____

Monitoring data Literature review Process review

Other

EPB6 Version 13, June 2024 Page 26 of 65

9 Environmental risk assessments and modelling

You will need to carry out an environmental risk assessment or modelling to support your application. In some cases we will carry out your risk assessment: https://www.gov.uk/guidance/risk-assessments-for-your-environmental-permit. Answer all the questions that are relevant to your discharge. If an environmental risk assessment or modelling is required, you must send it to us with your application. We recommend you contact us for pre-application advice. You can apply for our enhanced pre-application advice. This is a chargeable service. For more information see Get advice before you apply for an environmental permit: https://www.gov.uk/guidance/get-advice-before-you-apply-for-an-environmental-permit.

Further guidance can be found in 'Surface water pollution risk assessment for your environmental permit' at https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit and 'Groundwater risk assessment for your environmental permit' at https://www.gov.uk/guidance/groundwater-risk-assessment-for-your-environmental-permit.

Send us the completed H1 risk assessment tool along with the raw data used to create the summary statistics.

The following information is required to allow the assessment to be undertaken:

- Which substances may be present in the discharge? Substances may be present if:
 - i. They're allowed to be added to the discharge (for example water company trade effluent consent or discharges from installations).
 - ii. You have added them to the discharge (for example iron or aluminium to remove phosphorus). Read the Environment Agency's guidance on dosed substances for the rules on this.
 - iii. You have detected them using chemical analysis.
- For existing discharges, the discharge effluent will need to be analysed for all the substances that may be present in the effluent. Baseline (upstream) river quality data may also be beneficial, as it will provide more accurate information for the assessment to be undertaken.
- For new discharges, estimated or proxy site data will be necessary.
- For each substance, please provide the information set out in the table below.

Substance	The chemical name of the substance being analysed
Unit	The units of measurement. These will usually be micrograms per litre ($\mu g/l$), but may also be mg/l or ng/l
Maximum concentration	The maximum recorded concentration of the substance in the effluent
Minimum concentration	The minimum recorded concentration of the substance in the effluent
Mean concentration	The average recorded concentration of the substance in the effluent
Maximum flow	The maximum recorded effluent flow
Mean flow	The average recorded effluent flow
Number of samples	The minimum number of samples required for screening and modelling is 12; the ideal number is 36 (or, for new discharges, assumed means and standard deviations can be accepted if effluent data are not available).

EPB6 Version 13, June 2024 Page 27 of 65

Inputting metals into the H1 risk assessment tool	For metals with bioavailable EQSs for a more accurate assessment, we recommend running the dissolved data through the H1 risk assessment tool rather than total data. For all other metals use total data.
If the H1 risk assessment tool	For metals with bioavailable EQS's you only need to provide dissolved data. Total data can be used but this will lead to a more precautionary assessment.
shows modelling is required	For metals without bioavailable EQS's you need to provide dissolved and total data.
Required minimum reporting value	'Surface water pollution risk assessment for your environmental permit' at https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit or 'Groundwater pollution risk assessment for your environment permit' at https://www.gov.uk/guidance/groundwater-risk-assessment-for-your-environmental-permit and https://www.gov.uk/government/publications/protect-groundwater-and-prevent-groundwater-pollution , should be checked to determine the minimum reporting value for the analysis of each substance. If the detection limit used is not low enough, the analysis may need to be repeated.
EQS	The relevant environmental quality standard for the substance. This can be found in 'Surface water pollution risk assessment for your environmental permit' at https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit

For discharges to a freshwater (non-tidal) river, in general you do not need to carry out modelling for sanitary parameters such as biochemical oxygen demand or ammonia. Most of the information we will need to do this can be provided on part B6, but you may need to add other relevant details. If our assessment concludes that we are not able to accept the proposed activity, we may ask you to provide further evidence by carrying out a higher level of assessment yourself, or we may advise you that the proposed discharge is unacceptable. Where you plan to do the assessment yourself you may need to contact us for information or advice first.

9a Discharges to surface water (except canal, lake, or reservoir).

For discharges to a freshwater (non-tidal) river, if you have answered 'yes' to any of 8a to 8c, the discharge contains, or potentially contains, specific substances.

You must carry out a specific substances screen of sample data using the H1 risk assessment tool in 'Surface water pollution risk assessment for your environmental permit' at https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit. Send us the completed H1 risk assessment food along with the raw data used to create the summary statistics.

Document reference for the H1 risk assessment tool and raw data

Note: if you do not submit the H1 risk assessment tool and raw data we will return your application to you.

EPB6 Version 13, June 2024 Page 28 of 65

9b Discharges to canals, lakes, reservoirs, estuaries, coastal waters or bathing waters.

For discharges to canals, lakes, estuaries, coastal waters or bathing waters you must submit a risk assessment.

Document reference for the risk assessment ______

In addition, if you have answered 'yes' to any of 8a to 8c, the discharge contains, or potentially contains, specific substances. You must carry out another modelling report following the guidance 'Surface water pollution risk assessment for your environmental permit' (see https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit). Send us details of how the modelling was carried out and the outcome.

We cannot undertake assessments on your behalf, but we can offer advice as to what needs to be done. If you do not have the skills to do this yourself, then you will need to engage a consultant to advise you and to undertake the assessment.

Document reference for the modelling report ______

Note: if you do not submit the risk assessment and the modelling report we will return your application to you.

9c Sewer modelling report (for discharges of final effluent from a water company WwTW or intermittent sewage discharges).

For discharges of final effluent from a water company WwTW or intermittent sewage discharges, you must submit a sewer modelling report. Send us details of how the modelling was carried out and the outcome.

Document reference for the H1 risk assessment tool and raw data

Have you answered yes to any of 8a to 8c?

No

Yes Send us the completed H1 risk assessment tool, along with the raw data used to create the summary statistics

Document reference for the H1 risk assessment tool and raw data

Note: if you do not submit the H1 risk assessment tool and modelling report, we will return your application to you.

EPB6 Version 13, June 2024 Page 29 of 65

9d Discharges to ground.

You must carry out a groundwater quantitative risk assessment following the guidance in 'Groundwater risk assessment for your environmental permit' (see https://www.gov.uk/guidance/groundwater-risk-assessment-for-your-environmental-permit). For discharges to ground, we will usually be able to carry out a risk assessment for you where the discharge is less than 15 cubic metres per day of treated domestic sewage and in a non-sensitive area, (see https://www.gov.uk/guidance/groundwater-risk-assessment-for-your-environmental-permit for further information).

We will expect you to do the risk assessment in other situations and we can offer advice as to what needs to be done. If you do not have the skills to do this yourself, then you will need to engage a suitably qualified consultant to advise you and to undertake the assessment. For further guidance see 'Groundwater risk assessment for your environmental permit' at https://www.gov.uk/guidance/groundwater-risk-assessment-for-your-environmental-permit

For groundwater remediation schemes you must send a site-specific remediation strategy that has been agreed with the local Environment Agency groundwater and contaminated land team. This should include:

- conceptual model
- quantitative site-specific risk assessment
- site-specific remedial targets
- details of the contaminant concentrations contained within the proposed discharge

Send us details of how the modelling was carried out and the outcome.
Document reference
Note: If you do not submit the risk assessment and modelling report we will return your application to you.

9e Discharges to freshwater (non-tidal) rivers from an installation, including discharges via sewer

If the discharge contains, or potentially contains, any specific substances, you must carry out screening following the guidance (see https://www.gov.uk/guidance/surface-water-pollution-risk-assessment-for-your-environmental-permit).

Have you answered yes to any of 8a to 8c?

1			
ı	N	•	٦
ı	IV	ı	

Yes Send us the completed H1 risk assessment tool, along with the raw data used to create the summary statistics. Where the discharge is via sewer, include sewage treatment reduction factors in the calculations.

Document reference for the H1 risk assessment tool and raw data

Note: if you do not submit the H1 risk assessment tool, we will return your application to you.

EPB6 Version 13, June 2024 Page 30 of 65

9f Environmental impact assessment.

Have you carried out an environmental impact assessment?

No

Yes Send us details of how the assessment was carried out and the outcome.

Document reference for the environmental impact assessment

EPB6 Version 13, June 2024 Page 31 of 65

10 Monitoring arrangements

10a What is the national grid reference of the inlet sampling point? (for example, SJ 12345 67890)

This is the sample point that will be used for discharges which are made up of returned abstracted water; for example, fish farms and cooling water. In these cases we will set a comparative limit to assess compliance against. It is also required for larger sewage treatment sites that meet the requirements of the Urban Waste Water Treatment Regulations (UWWTR). It allows a composite sample of the influent to the sewage treatment works to be obtained. You must provide a permanent means of access to monitoring points.

NGR:
10b What is the national grid reference of the effluent sample point?
This is the sample point used to assess compliance with any water quality emission limits on your permit. You must ensure that it allows a representative sample of the discharge to be obtained. You must also ensure that all constituents of the discharge pass through the sampling point at all times. The sample point can be where the effluent meets the receiving environment only in cases where no other effluent is added before this point. You must provide a permanent means of access to monitoring points. Note for small existing discharges to ground only: If you are applying for a permit for an existing discharge of treated sewage effluent of not more than 5 cubic metres a day to ground (for example, using a drainage field) which does not already have a sample point we will not expect you to provide one.
NGR:
10c Do you have an Urban Waste Water Treatment Directive final effluent sampling point?
This is a requirement for larger sewage treatment sites that meet the requirements of the UWWTR. It allows a composite sample of the final effluent from the sewage treatment works to be obtained. Further guidance on the UWWTR can be found analytical-parameters . You must provide a permanent means of access to monitoring points.
Yes Please provide the national grid reference
10d What is the national grid reference of the flow monitoring point?
If your effluent has a maximum volume of 50 cubic metres a day or less you do not need to complete questions 10d or 10e. See https://www.gov.uk/government/publications/minimum-requirements-for-self-monitoring-of-flow-mcerts-performance-standard
NGR:

EPB6 Version 13, June 2024 Page 32 of 65

emission to water or sewer from an installation		
10e Does the flow monitor have an MCERTS certificate?		
Yes Please give the certificate number No		
10f Do you have a UV disinfection efficacy monitoring point?		
This type of monitoring point is only required for discharges that undergo some form of defer example, ozone or ultraviolet disinfection, membrane filtration and so on.	isinfection.	
Yes Please provide the national grid referenceNo		
10g Do you have an event duration monitoring or a discharge operation monitoring point	!?	
Yes Please provide the national grid reference \(\) No		
10h Do you have an overflow operation (into storm tank) monitoring point?		
Yes Provide the national grid reference L. No		
10i Do you have a flow passed forward monitoring point?		
Yes Provide the national grid reference		

10j You should clearly mark on the plan the locations of any of the above that apply to this effluent.

If you have answered yes to 10i, where is the flow passed forward monitor installed?

You must send us a map or plan that:

Post treatment process

• is A4 or larger

No

Inlet

- is at a scale of 1:10,000 (approximately 6 inches to 1 mile)
- · shows clearly which direction north is

The plan should show:

- the boundary of the site including the full extent of the land ownership relating to the permit application
- the premises discharging effluent
- the site in relation to the local area
- any watercourses, wells, springs or boreholes on the site (or within 50 metres of it).

You must also mark on the map points to show where:

- effluent is discharged into the controlled waters
- samples of effluent and influent can be taken automatically or manually (if required)

EPB6 Version 13, June 2024 Page 33 of 65

• flow or quality will be measured (if required)

You may submit more than one plan if necessary.

Document reference for the plan

10k Do you intend to do your own effluent monitoring?

Yes

No

EPB6 Version 13, June 2024 Page 34 of 65

11 Where will the effluent discharge to?

11a Mark in Table 3 where this effluent discharges to and fill in the relevant section or sections.

You must use the name you gave to this effluent in answer to question 1b of this form when filling in your relevant appendix or appendices.

Table 3 – Where the effluent discharges to

Receiving environment	Relevant section
Tidal river, tidal stream, estuary or coastal waters	1
Non-tidal river, stream or canal	2
Lake or pond	3
Discharges to a British Standard drainage field or drainage mound	4 and 5
Discharges into ground not using a British Standard drainage field or drainage mound	4 and 6
Discharges onto land via grass plot	

Effluents are usually discharged to one location in one receiving environment. However, if your effluent can be discharged to more than one location within a single receiving environment, for example, two different discharge points on a non-tidal river, you should complete the appropriate section and ensure you give all relevant details of every discharge point that the effluent can be discharged through. To do this you will need to complete a relevant appendix for each separate discharge point for an effluent and explain any different circumstances under which each is used.

If your effluent discharges to more than one location in a different receiving environment, for example, to a borehole or to a non-tidal river (under different circumstances), you will need to complete all relevant appendices for each discharge point and explain the different circumstances under which each is used.

Note: You need to make sure that you have all the necessary permissions to discharge from landowners, for example The Canal and Rivers Trust, if you want to discharge into a canal that they manage, or the local highways authority if you want to discharge via a highway drain.

11b lstl	nis effluent discharged through more than one outlet?
No	
Yes	Give details, on an extra sheet, of the circumstances under which each outlet would be used by this effluent
Documer	nt reference
-	ou answered yes to question 11b above make sure you show cle arly on your discharge point or sections and site plan that this one effluent c an disch arge to more than one discharge point
You must	give us all the details we need for each of the discharge points used by this effluent.

Page 35 of 65 EPB6 Version 13, June 2024

12 How to contact us

If you need help filling in this form, please contact the person who sent it to you or contact.

General enquiries: 03708 506 506 (Monday to Friday, 8am to 6pm) Textphone: 03702 422549 (Monday to Friday, 8am to 6pm)

Email: enquiries@environment-agency.gov.uk

Website: https://www.gov.uk/government/organisations/environment-agency

If you are happy with our service, please tell us. It helps us to identify good practice and encourages our staff. If you're not happy with our service, please tell us how we can improve it.

Please tell us if you need information in a we can keep in touch with you more easily.	different language or format (for example, in large print) so
Feedback	
(You don't have to answer this part of the fo	orm, but it will help us improve our forms if you do.)
	nd our guidance notes easy to understand. Please use the may have about this form or the guidance notes that came
How long did it take you to fill in this form?	
We will use your feedback to improve our for regulations could be made simpler.	orms and guidance notes, and to tell the Government how
Would you like a reply to your feedback?	
Yes please	
No thank you	
For Environment Agency use only	
Date received (DD/MM/YYYY)	Our reference number
Payment received?	
No	
Yes	
Amount received (£)	

EPB6 Version 13, June 2024 Page 36 of 65

Section 1: Discharges to tidal river, tidal stream, estuary or coastal waters

Answer all the questions below. Use a separate line for each effluent if more than one effluent discharges using this discharge point. Remember, when linking your effluent to a discharge point you must use the name you gave to your effluent in answer to question 1b in the effluent form.

1.1 Give the discharge point a unique name.
For example, 'Outlet 1' (you must use this name to identify the discharge point on the plan)
1.2 Give the national grid reference of the discharge point.
NGR:
1.3 Give the name of the tidal river, tidal stream, estuary or area of coastal water.
1.4 Is the discharge into a:
Tidal river
Tidal stream
An estuary
Coastal water
1.5 Does the discharge reach the watercourse by flowing through a surface water sewer?
Most effluents pass along a dedicated pipe and are discharged via an outlet to a receiving water. In some cases effluents may be discharged into a surface water sewer owned by someone else before they discharge into a receiving water. If this is the case you must give the national grid reference where your discharge enters the surface water sewer
Yes, give the national grid reference where the discharge enters the surface water sewer.
NGR:
Give the national grid reference where the surface water sewer meets the final watercourse, for example, river or lake.
NGR:
No

EPB6 Version 13, June 2024 Page 37 of 65

1.6 Does the discharge reach the final surface watercourse or canal by flowing through highway drains?
Highway drains: "Highway drain" means a drain which a highway authority or other person is entitled to keep open by virtue of section 100 of the 1980 Act.
No Yes Give the national grid reference where the discharge enters the highway drain.
NGR:
Note: Give the national grid reference where the highway drain meets the final surface water course, for example, river or lake.
NGR:
Have you obtained written permission from the relevant highways authority?
Yes You need to get a written permission from the relevant highways authority and submit it with your application.
If yes, it is your responsibility to ascertain whether the relevant highways authority is responsible for the roadside drain or ditch. If it is, you need to secure the appropriate permissions before submitting an application for an environmental permit to the Environment Agency. A copy of the written permission from the relevant highways authority must be submitted with the environmental permit application.
Document reference for the written permission
Note: Your application will be returned if you do not get written permission from the relevant highways authority before you submit this permit application.
1.7 Is the discharge point above the mean low water spring tide mark?NoYes Please explain, on an extra sheet, why the discharge cannot be made below this point
Document reference
1.8 How is the effluent dispersed?
For example, open pipe or diffuser system. Choose 'open pipe' if the effluent enters the tidal river, estuary or coastal water from a pipe. We will have told you if a diffuser is needed during preapplication discussions.

If diffuser system so to question 1.9

1.9 Give details, on an extra sheet, of the design of the diffuser system.

Document reference ______

EPB6 Version 13, June 2024 Page 38 of 65

Section 2: Discharges to non-tidal river, stream, ditch or canal

Answer all the questions below. Use a separate line for each effluent if more than one effluent discharges using this discharge point. Remember, when linking your effluent to a discharge point you must use the name you gave to your effluent in answer to question 1b in the effluent form.

2.1 Give the discharge point a unique name.	
For example, 'Outlet 1' (you must use this name to identify the dischar	ge point on the plan)
2.2 Give the national grid reference of the discharge point:	
NGR:	
2.3 Give the name of the watercourse, canal or the main watercourse	if it is a tributary:
2.4 Is the discharge into a	
Non-tidal river	
Stream or ditch	
Canal	
2.5 Does the discharge reach the watercourse or canal by flowing thr	ough a surface water sewer?
some cases effluents may be discharged into a surface water sewer of they discharge into a receiving water. If this is the case you must give where your discharge enters the surface water sewer.	
Yes Give the national grid reference where the discharge enters	the surface water sewer.
NGR:	
Give the national grid reference where the surface water sewer meets river or lake.	the final watercourse, for example
NGR:	
No	
2.6 Does the discharge reach the final surface watercourse or canal b drains?	y flowing through highway
Highway drains: "Highway drain" means a drain which a highway auto keep open by virtue of section 100 of the 1980 Act.	thority or other person is entitled
No	
Yes Give the national grid reference where the discharge enters	the highway drain.
NGR:	

EPB6 Version 13, June 2024 Page 39 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Give the national grid reference where the highway	drain meets th	e final surface	water course,	, for
example, river or lake.				

Note: If yes, it is your responsibility to ascertain whether the relevant highways authority is responsible for the roadside drain or ditch. If it is, you need to secure the appropriate permissions before submitting an application for an environmental permit to the Environment Agency. A copy of the written permission from the relevant highways authority must be submitted with the environmental permit application.

Have you obtained written permission from the relevant highways authority?

Yes

Document reference for the written permission from the relevant highways authority.

Note: Your application will be returned if you do not get written permission from the relevant highways authority before you submit this permit application.

2.7 Does the watercourse dry up for part of the year?

If a watercourse is dry other than at times of rainfall, this means it does not have a year-round flow. We would expect for a watercourse to have flow all year round regardless of rainfall events unless an event such as extreme drought or an unusually long period of dry weather.

No, it always has flowing water in it.

Yes, it is dry for part of the year: indicate the months when the watercourse is dry:

January

February

March

April

May

June

July

August

September

October

November

December

Yes, it is dry all year-round.

If you apply to discharge to a watercourse that never has flowing water, you must provide justification why a discharge into ground via a British Standard drainage field is not possible. You must prove this justification by completing **section 4: Preliminary questions for discharges to ground.**

EPB6 Version 13, June 2024 Page 40 of 65

Tick to confirm you have completed section 4: Preliminary questions for discharges to ground.

2.8 If the watercourse does dry up for part of the year, how many metres downstream of the discharge is it before the discharged effluent soaks into the ground?

You must install an appropriate length of perforated pipe before the discharge point that does not extend more than 10 metres from the bank of any watercourse. Any section of that pipe which lies within 10 metres of the bank of any watercourse must be perforated. The length of perforated pipe installed should be designed appropriately to ensure that when the watercourse is dry, the discharge must be made indirectly to the watercourse via the soil surrounding the perforated pipe. You must make sure to design your system to ensure an appropriate length of perforated piping is installed.

Tick the box to confirm you will install a section of perforated pipe as per the above guidance.

EPB6 Version 13, June 2024 Page 41 of 65

Section 3: Discharges to a lake or pond

You do not need a permit to discharge to an enclosed lake or pond. This means a lake or pond in which all of the following apply:

- it contains water throughout the year, other than in extreme weather conditions
- it does not have an outfall that connects it to a watercourse, or has an outfall that only discharges in extreme weather conditions
- It is sealed or lined to prevent water draining into the ground or soaking into the surrounding soil.

You must use appropriate pollution prevention measures to make sure your discharge does not cause pollution.

Answer all the questions below. Use a separate line for each effluent if more than one effluent discharges using this discharge point. Remember, when linking your effluent to a discharge point you must use the name you gave to your effluent in answer to question 1b in the effluent form.

0 0,	oint. Remember, when linking your effluent to a discharge point you our effluent in answer to question 1b in the effluent form.
3.1 Give the discharge point a ur	nique name.
For example, 'Outlet 1' (you must	yse this name to identify the discharge point on the plan)
3.2 Give the national grid referen	nce of the discharge point.
NGR:	
3.3 Give the name of the lake or	pond.
3.4 Select from the following list relevant questions	the type of lake or pond you will be discharging to and answer the
Type of lake or pond	
•	discharge into a river or a watercourse or another pend that then attercourse. Permit not required.
discharges into a river or wate	discharge into a river or watercourse or another pond that then ercourse, where you have had a notice served under paragraph 5 of ental Permitting (England and Wales) Regulations 2016.
A lake or pond that discharge	s into a river or watercourse.
3.5 What is the surface area of the	ne lake or pond?
	square metres
3.6 What is the maximum depth	of the lake or pond?
	metres
3.7 What is the average depth of	the lake or pond?

EPB6 Version 13, June 2024 Page 42 of 65

| metres

Section 4: Preliminary questions for discharges to ground

If you are applying to continue to discharge sewage effluent to ground using an infiltration system which was installed before 1 January 2015 provide, the information in question 4.4 onwards, but if you have it, also provide the information in questions 4.1, 4.2 and 4.3.

For all proposed discharges to ground and for systems which started discharging to ground on, or after, 1 January 2015 start at question 4.1.

Percolation testing

An infiltration system is a restricted and well-defined area of ground designed to allow effluent to enter the ground. We expect any new infiltration system to be built to British Standard BS6297:2007 +A1:2008 Code of practice for the design and installation of drainage fields for use in wastewater treatment (or latest version).

Drainage fields are an important component of the treatment of your sewage. If you are proposing to use an alternative infiltration system, we require you to first demonstrate whether a shallow drainage field, designed in accordance with the BS6297, could be achieved based on ground conditions, the percolation rate and available space.

BS6297 sets out the percolation test procedure. You need to carry out percolation tests following this procedure which is summarised at https://www.gov.uk/guidance/infiltration-systems-groundwater-risk-assessments#percolation-tests. Use of alternative test methods, for example, test methods for surface water soakaways, will not be accepted.

4.1a Were each of the percolation test holes 300mm square and 300mm deep below the proposed invert level (bottom) of the infiltration pipe?

Yes

Reference for the extra sheet. L

No Provide justification why you have not used the above measurement. Use of an alternative test method, for example, test methods for surface water soakaways, will not be accepted. Provide the details in the following box or an extra sheet.

EPB6 Version 13, June 2024 Page 43 of 65

	l you fill each hole with water to a depth of at least 300mm and allow it to seep away overnightarting your measured percolation testing?
Yes	
No	Tell us why, in the following box or an extra sheet.
Referenc	e for the extra sheet.
4.1c Wh	at were the weather conditions when you carried out the percolation testing?
Describe	the conditions in the following box.
	I your percolation tests achieve a drop in water level of 150mm from the moment the holes 6 full to when they were only 25% full?
Yes	Complete Table 1: For percolation test results where a drop of 150mm was achieved.
No	Complete Table 2: For percolation test results where a drop of 150mm was not achieved.
No	Infiltration system installed before 1 January 2015 and no information available on

To meet the British Standard requirements, you must complete at least three tests in two holes which are spaced evenly along the proposed line of the subsurface drainage field.

Information for more than two test holes can be supplied – especially if a large area has been investigated or initial tests show unsatisfactory results.

percolation tests. Now go to question 4.4.

EPB6 Version 13, June 2024 Page 44 of 65

Table 1: For percolation test results where a drop of 150mm was achieved

Worked example

Percolation test hole number:	1	Your unique reference for this hole	TP - 01
		(as used on your site plan)	

Elapsed time for water to drain from

75% full to 25% full (a depth of 150 mm)

Test date (DD/MM/YYYY)	Test no.	Start time (24-hour clock)	Finish time (24-hour clock)	As hours and minutes	As minutes	As seconds	Percolation value (Vp) – Seconds divided by 150mm (s/mm)
01/04/2023	1	09:50	11:00	1h 10mins	70	4,200	28
01/04/2023	2	11:15	12:15	1hr	60	3,600	24
01/04/2023	3	13:30	14:50	1hr 20mins	80	4,800	32

Your reference number should match the reference number used to show the location of each test hole on your site plan requested in question 4.7. Each test hole should have a unique reference number.

To calculate the average Vp you will need to add the Vp for each test you have completed and divide by the number of tests.

Test 1 Vp	Test 2 Vp	Test 3 Vp		Divided by the number of tests completed (3 tests in this scenario)	(Test 1 Vp + Test 2 Vp + Test 3 Vp) ÷ 3		Average Vp
28	24	32	84		$(28 + 24 + 32 = 84) \div 3 =$	28	= Average Vp for worked example

EPB6 Version 13, June 2024 Page 45 of 65

Table 1a: For percolation test results where a drop of 150mm was achieved

Percolation test hole number:	1	Your unique reference for this hole	
Percolation test note number:	1	(as used on your site plan)	

Elapsed time for water to drain from 75% full to 25% full (a depth of 150 mm)

Test date DD/MM/YYYY	Test no.	Start time (24-hour clock)	Finish time (24-hour clock)	As hours and minutes	As minutes	As seconds	Percolation value (Vp) – Seconds divided by 150mm (s/mm)
	1						
	2						
	3						

Average Vp for Hole 1

Table 1b: For percolation test results where a drop of 150mm was achieved

Percolation test hole number:	2	Your unique reference for this hole (as used on your site plan)
-------------------------------	---	---

Elapsed time for water to drain from

75% full to 25% full (a depth of 150 mm)

Test date DD/MM/YYYY	Test no.	Start time (24-hour clock)	Finish time (24-hour clock)	As hours and minutes	As minutes	As seconds	Percolation value (Vp) – Seconds divided by 150mm (s/mm)
	1						
	2						
	3						

Average Vp for Hole 2

EPB6 Version 13, June 2024 Page 46 of 65

Form EPB: Application for an environmental permit - Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Table 1c: For percolation test results where a drop of 150mm was achieved

Percolation test hole number: 3 Your unique reference for this hole (as used on your site plan)	number: 3
---	-----------

Elapsed time for water to drain from $% \left(1\right) =\left(1\right) \left(1\right) \left($

75% full to 25% full (a depth of 150 mm)

Test date DD/MM/YYYY	Test no.	Start time (24-hour clock)	Finish time (24-hour clock)	As hours and minutes	As minutes	As seconds	Percolation value (Vp) – Seconds divided by 150mm (s/mm)
	1						
	2						
	3						

Average Vp for Hole 3

16	the results on an extra sheet, and ensure you include this data in the calculation of average Vp.
IT VALL CAMBIETE TESTS IN MATE THAN THISE HAIES BROWLES T	the recility on an extra cheef, and enclire you incline this data in the calculation of average yo
ii you complete tests iii more than tinee notes prowuc t	the results on an extra sheet, and ensure you include this data in the calculation of average vp.

Reference for the extra sheet.

Table 1d: Average Vp of all test holes

Average Vp for Hole 1 (table 1.a)

+ Average Vp for Hole 1 (table 1.b)

+ Average Vp for Hole 1 (table 1.c), if completed

Total

, divide the total by the number of test holes completed

= Overall average Vp of all your test holes.

EPB6 Version 13, June 2024 Page 47 of 65

Form EPB: Application for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source emission to water or sewer from an installation

Table 2: For percolation test results where a drop of 150mm was not achieved

Percolation test hole	Your reference number (if alternative numbering	Test date (DD/MM/YYYY)	Test No.	Start time (24-hour clock)	Finish time (24-hour clock)	Change in water level during test (mm)
number	used on site plan)					

EPB6 Version 13, June 2024 Page 48 of 65

British Standard BS6297 trial holes

British Standard BS6297 requires a trial hole to be excavated to characterise the soil and subsoil and show whether shallow groundwater is present. The trial hole should be excavated adjacent to the area where the drainage field will be installed. If soil conditions are variable further trial holes should be dug. Trial holes differ to test holes which are used to establish soil percolation rates.


4.2a What were the characteristics of the soil and subsoil that y	you observed in the trial holes and test
holes on site?	

holes on site?
Only describe what was observed in your trial holes and test holes, do not include information from other sources. Use the following box or an extra sheet.
Reference for the extra sheet
Provide at least one photograph per trial and test hole, and written observations made on site.
References for these photograph attachments and observations.
4.2b Was groundwater present in the trial hole?
No No
Yes At what depth?
metres below ground level
Infiltration system area
4.3a Calculate the trench area required for a British Standard BS6297 drainage field based on your
percolation value (Vp): If the infiltration rate was so slow a drop of 150mm was not achieved and you
have filled out Table 2, you are not able to calculate a Vp value. Now go to question 4.3b.
150 litres (equivalent to 0.15 cubic metres) is the standard residential volume of sewage generated per person per day. We use this to calculate the population for both domestic and non-domestic premises.
use your answer to 1.3
Max volume of effluent (403/day)

EPB6 Version 13, June 2024 Page 49 of 65 Now you need to calculate the trench area in accordance with British Standard BS6297 using the population (p) and your percolation value (Vp).

If your Vp result indicates fast infiltration (less than 15 s/mm) you need to use a sand layer or drainage mound. The area of your system should meet or exceed the area calculated based on a Vp of 15 s/mm.

If your Vp is greater than 100 s/mm, it is outside the British Standard BS6297 acceptable range and indicates slow infiltration rates which are not suitable for the installation of a drainage field.

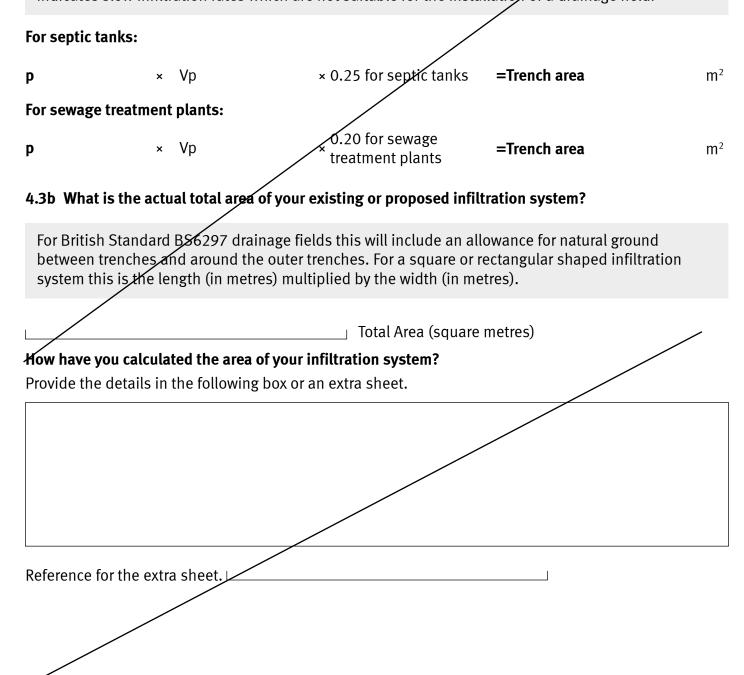

EPB6 Version 13, June 2024 Page 50 of 65

Site setting

Yes

You need a permit if you are discharging to ground in a source protection zone 1 (SPZ1). Source protection zones are explained at https://www.gov.uk/guidance/groundwater-source-protection-zones-spzs. A groundwater SPZ1 is also any area within 50 metres of a private water supply used for human consumption or food production.

You must check if there are any private wells, springs, or boreholes used to supply water for human consumption or food production purposes within 50 metres of your proposed discharge. You can contact your local authority for details on private water supplies. These supplies are not required to hold a permit from the Environment Agency if they pump less than 20 cubic metres (20 m³) per day, so we do not have the relevant information.

This information may belong to your neighbours. How you should manage this is explained at https://www.gov.uk/guidance/environmental-permits-privacy-notice#your-responsibility-with-other-peoples-personal-data.

4.4a Are there any wells, springs or boreholes within 50 metres of your infiltration system?

Tick to confirm you have checked with:

Local property and landowners

Neighbours

Local authority

Now go to 4.4d.

4.4b Is the well, spring or borehole you have identified used to supply drinking water or for food production purposes?

No **Now go to question 4.4d.**

Yes You must describe what the water supplied is used for, in the following box or an extra sheet. Identify the location of the well, spring or borehole on the plan required in question 4.7.

Reference for the extra sheet.	
--------------------------------	--

4.4c Where available provide the following information:

- The depth to groundwater from ground level.
- Construction details for boreholes and wells.
- The depth of the pumping equipment from ground level.
- Results of any water quality testing.
- Details of treatment of the water prior to consumption.
- Details of any known pollution incidents that impacted the water.

EPB6 Version 13, June 2024 Page 51 of 65

Provide these	e details in the following box or an extra sheet.
Reference for	the extra sheet.
	the distance to the nearest watercourse (for example, surface water, river or stream)?
Ī	metres
If the waterco question 4.7.	urse is within 10 metres of your infiltration system identify it on the site plan required by
Our preferre	of a British Standard drainage field of system for treated sewage effluent to be discharged to ground is an engineered, inage field designed in accordance with British Standard BS6297.
4.5a Is the av British Standa	verage percolation test result within the acceptable range (15 to 100 s/mm) required by ard BS6297?
Check your ar	nswer to question 4.1, Table 1d Average Vp
Yes	Now go to question 4.5b.
No	The average Vp is less than 15 s/mm. Now go to question 4.5b.
No	The average Vp is greater than 100 s/mm. Now go to 4.5e.
Not sure	I will be using an infiltration system installed before 1983 and do not have any percolation test results. Now go to question 4.5d.
Not sure	I will be using an infiltration system installed between 1983 and 2014 and do not have percolation test results. Now go to question 4.5d.
Not sure	Other. Explain why in the following box or an extra sheet.
Reference for	the extra sheet.

EPB6 Version 13, June 2024 Page 52 of 65

4.5b Is there space for a British Standard BS6297 drainage field?

Use the area you have calculated in question 4.3a and 4.3b, the dimensions of the land available and presence of any buildings to explain your response.

•	
Yes	
No	Explain why in the following box or an extra sheet.
	there any other restrictions to installing a British Standard BS6297 drainage field?
No	
Yes	Explain what these are in the following box or an extra sheet.

Reference for the extra sheet.

4.5d Will your discharge be to a new or existing drainage field which complies with the British Standard BS6297?

Yes, a British Standard drainage field or drainage mound (or sand layer) will be used. **Complete questions 4.6 to 4.8, then go to Section 5.**

Unsure, I will be using an existing system installed before 1 January 2015 and do not know if it complies with BS6297.

Tick to confirm which of the following best describes your existing system:

Drainage field. Complete questions 4.6 to 4.8, then go to Section 5.

Pit or soakaway. Complete questions 4.6 to 4.8, then go to Section 6.

Well or borehole. Complete questions 4.6 to 4.8, then go to Section 6.

Concrete ring. Complete questions 4.6 to 4.8, then go to Section 6.

No, I will be using a non-British Standard infiltration system.

If your answers to questions 4.5a, 4.5b, and 4.5c indicate a British Standard drainage field could be installed but you are choosing not to use one when there are no restrictions, explain why. Provide your answer in the following box or an extra sheet.

EPB6 Version 13, June 2024 Page 53 of 65

Form EPB: Ap emission to w	plication for an environmental permit – Part B6 water discharge activity or groundwater (point source) activity, or point source vater or sewer from an installation
Reference	e for the extra sheet.
	d conditions and space would allow the installation of a British Standard drainage field, but choosing not to install one we are more likely to refuse an environmental permit for such ges.
45e Whe	ere would your pon-British Standard infiltration system discharge the effluent?
Into la	
	land via a grass plot
Other	
Milei	
This is a	proceeding with your application, you can apply for our enhanced pre-application advice. chargeable service. For more information see: https://www.gov.uk/guidance/get-advice-you-apply-for-an-environmental-permit .
	re already had enhanced pre-application advice for this proposal provide the reference number nhanced pre-application.
Reference	e for the enhanced pre-application advice.
surface in	ou proposing a new discharge of treated domestic effluent to ground via a shallow sub- ifiltration system in a groundwater source protection zone 1 (SPZ1) with a discharge volume 2 to 15 cubic metres a day?
No	Your proposed discharge does not require you to submit a separate quantitative risk assessment, but you must provide sufficient information as required by this application form to allow the risk assessment to be completed on your behalf by the Environment Agency.
Yes	Your proposed discharge requires you to submit a quantitative risk assessment.
Reference	e for the risk assessment.
assessn carried of then we	is you need to follow the guidance at https://www.gov.uk/guidance/groundwater-risk-nent-for-your-environmental-permit and send us details of how the risk assessment was out and the outcome. If the discharge is, or will be, made to a subsurface infiltration system recommend you read https://www.gov.uk/guidance/infiltration-systems-groundwater-risk-nents . This includes advice and a worksheet on how to carry out the risk assessment for

EPB6 Version 13, June 2024 Page 54 of 65

shallow infiltration systems. This methodology is not appropriate for deep infiltration systems such as boreholes and wells or systems which cover a relatively small area, for example, concrete rings.

Site plan

4.7 Provide a site plan that contains the following information with your application.

The requirements detailed below must match the national grid references for the relevant locations provided in this application, or the processing of your application may be delayed, or returned. If you are applying for a permit for an existing discharge to ground using an infiltration system installed before 1983, please provide as much detail as possible on your site plan but we understand you may not possess detailed records.

Reference for your site plan.
Required for all cases: Tick the boxes to confirm you have added these requirements to the site plan
The boundary of the site including the full extent of the land ownership relating to the permit application.
Location of the treatment system.
Location of the sampling point or points.
Location of the discharge point or points.
If you are discharging to ground, this is the location where the effluent from the treatment system enters the infiltration system.
A north arrow.
The properties served by the treatment system do not have to be shown.
Where a percolation test has been carried out, mark the test hole locations. Each test hole should be given a unique reference number to match the reference used in the percolation results in Table 1 or Table 2. We need to understand which percolation result relates to which hole.
Unique percolation test hole reference.
The extent of the infiltration system with the length and width of each side annotated in metres.
Any restrictions in installing a British Standard BS6297 drainage field? For example, the boundary of the property, or proximity to any other buildings. Please also provide distances in metres.
The area covered by any infiltration system which is being replaced and will no longer be used.
Any well spring or borehole within 50 metres of the discharge point.
Any watercourse within 10 metres of your infiltration system.
4.8 If your application is for a sewage treatment plant which you are already using or you have selected the plant you propose to use, provide details:
Make and model:
The final effluent quality achieved for:
Ammoniacal nitrogen
(mg/l as nitrogen (N)).

EPB6 Version 13, June 2024 Page 55 of 65

Any other chemical parameters quoted by the man	ufacturer	
	parameter	mg/l
For new discharges to a non-British Standard infi using a sewage treatment plant that meets Britis	•	· · · · · · · · · · · · · · · · · · ·

EPB6 Version 13, June 2024 Page 56 of 65

Section 5: Discharges to a British Standard drainage field or drainage mound

Ensure y	ou have full	y completed	Section 4	before of	completing	this section.
----------	--------------	-------------	------------------	-----------	------------	---------------

5.1 Tick to confirm which type of British Standard system you are applyi

Drainage field.

Drainage field with additional sand layer due to fast infiltration (less than 15 s/mm).

Drainage mound.

A drainage field installed before 1983. For systems installed before 1983 **complete questions 5.2 and 5.3**. You only need to answer questions 5.4 to 5.7 if you have the information.

A drainage field installed between 1983 and 2014 and you do not have percolation test results. **Complete questions 5.2 and 5.3.** You only need to answer questions 5.4 to 5.7 if you have the information.

5.2	Tick the appropriate t	óx to describe t	the drainage field	or mound
-----	------------------------	------------------	--------------------	----------

Not built yet.	
Built but not yet in use.	
When was it built?	(DD/MM/YYYY)
Already being used to discharge effluent.	
When was it built?	(DD/MM/YYYY)
When was it operational?	(DD/MM/ <i>X</i> YYY)

5.3 What are the maximum dimensions of your drainage field?

Tick to show whether this is measured, proposed or estimated:

Imetres:

	Measured Proposed Estimated		
	Estimated		
Width		metres:	
	Measured		/
	Proposed		
	Estimated		
_			
Depth		metres:	
	Measured		
	Proposed		

Estimated

Length |

EPB6 Version 13, June 2024 Page 57 of 65

Drainage field details
5.4 What is the thickness of your distribution layer beneath the infiltration pipes?
metres
The British Standard BS6297:2007 + A1:2008 requires the distribution layer to be 0.2 to 0.3 metres thick.
If your answer to question 5.4 is less than 0.2 metres you will also need to complete Section 6 as you have not met the minimum thickness required by the British Standard.
5.5 Is there a minimum of 1.2 metres of unsaturated soil between the seasonally highest groundwater level and the base of the trench that the perforated pipes are laid in?
Yes
No
Tell us how you know this and if you have any additional information on the local depth to groundwater.
Provide you answer in the following box or an extra sheet.
Reference for the extra sheet.
5.6 Drainage mounds and drainage fields with additional sand layers.
Tell us why you need a drainage mound or additional sand layer in the following box or an extra sheet.

5.7 If the average percolation test value (Vp) is less than 15 s/mm, tick both to confirm:

Reference for the extra sheet. L

A minimum 0.7 metres thick layer of medium or coarse washed sand is laid on a geotextile membrane below the granular fill distribution layer.

The minimum floor area must be calculated using a Vp equal to 15 s/mm. Refer to question 4.3a.

EPB6 Version 13, June 2024 Page 58 of 65

Section 6: Discharges to ground NOT using a British Standard drainage field or drainage mound

Our preferred infiltration systems are drainage fields designed in accordance with British Standard BS6297. Drainage fields are an important component of a non-mains wastewater treatment system and provide additional treatment of the effluent. When the risk to groundwater, or other environmental receptors is assessed, we allow for this additional treatment.

If your infiltration system is not sized or designed in accordance with guidance in the British Standard it is likely to concentrate the discharge over a smaller area and/or discharge at a greater depth. This will pose a higher risk of groundwater pollution because it reduces the potential for further treatment of the effluent compared to a drainage field meeting the British Standard. Therefore, we are more likely to refuse an environmental permit for such discharges.

To evaluate this additional risk requires a more complex assessment. We require information on the design, dimensions, and local conditions to be able to complete this risk assessment on your behalf.

Before we complete this assessment, we need you to robustly demonstrate all of the following:

- 1. there is no other alternative (for example, discharge to a BS6297 drainage field or surface water) and then;
- 2. there is adequate evidence to inform a risk assessment;
- 3. the system will be no deeper than required to achieve sufficient infiltration;
- 4. evidence is provided to demonstrate how the discharge will not be direct to groundwater. Direct discharges of pollutants to groundwater cannot be permitted and any existing direct discharges will need to be made indirect:
- 5. where a new discharge is proposed then the effluent will first be treated by a package treatment plant.

Ensure you have fully completed **Section 4** before completing this section.

Depth to groundwater in the local area

The depth to groundwater is an important parameter in our risk assessments. Provide any relevant existing information on local groundwater levels, for example, from borehole records (BGS GeoIndex Onshore at https://www.bgs.ac.uk/map-viewers/geoindex-onshore) or knowledge of local wells, boreholes or springs.

0.14 Wildelisti	ie deptil to groundwater at, or near, your thosen distinance totation:
	metres below ground level.
6.1b How far a question 6.1a?	way from your discharge location is the information on groundwater level provided in
Distance:	
Units:	metres, kilometres or miles
6.1c What is th	ne source of your information on the depth to groundwater?
Reference for th	ne source of information.

EPB6 Version 13, June 2024 Page 59 of 65

Additional hydrogeological information

In addition to the depth to groundwater, our risk assessment uses information on the hydrogeological properties of the unsaturated and saturated zones beneath your discharge. When we assess your application, we will check if we already hold appropriate information. If we do not, we will ask you to supply this information at a later stage and this will lengthen the time to determine your application.

If you wish to know if we hold relevant information before submitting your permit application, you can apply for our enhanced level of pre-application advice. This is a chargeable service. For more information see https://www.gov.uk/guidance/get-advice-before-you-apply-for-an-environmental-permit.

6.2a What type of infiltration system are you proposing to use to	discharge the effluent to the ground?
Provide details in the following box or an extra sheet.	
Reference for the extra sheet.	
6.2b Tick the appropriate box to describe the infiltration system.	
Not built yet.	
Built but not yet in use.	
When was it built?	(DD/MM/YYYY)
Already being used to discharge effluent.	
When was it built?	(DD/MM/YYYY)
When was it operational?	(DD/MM/YYYY)
$6.2c\;$ What are the maximum dimensions of your infiltration syste	m?
For a square or rectangular system.	
Tick to show whether this is measured, proposed or estimated:	
Length metres:	
Measured	
Proposed	
Estimated	
Widthmetres.	
Measured	
Proposed	
Estimated	

EPB6 Version 13, June 2024 Page 60 of 65

Depth	metres:
	Measured
	Proposed
	Estimated
For circ	cular systems, for example, boreholes, wells or concrete rings:
Depth	∟metres:
·	Measured
	Proposed
	Estimated
Diamet	termetres:
	Measured
	Proposed
	Estimated
	nave estimated any of the dimensions of an existing system, explain what evidence the sions have been based on.
Provide	e details in the following box or an extra sheet.
Referer	nce for the extra sheet.
Existin	g infiltration systems – including those that have been built but not yet operational.
6.3a D	oes your infiltration system contain standing groundwater?
Yes	s – always contains groundwater. Now go to question 6.3b.
Soi	metimes – groundwater is present occasionally. Now go to question 6.3b.
No	- never contains groundwater. Now go to question 6.3d.
6.3b If	groundwater is always, or sometimes present, tell us the highest level it reaches?
	metres below ground level.
Is this:	
Ме	asured
	imated

EPB6 Version 13, June 2024 Page 61 of 65

6.3c Tell us how you will ensure that your discharge will not be directly into groundwater, including when groundwater levels are at a seasonal high. Provide details in the following box or an extra sheet.

Discharges must not be direct to groundwater. This is outlined in position statements G1 and G9 in

the Environment Agency's "Groundwater protection position statements", https://www.gov.uk/government/publications/groundwater-protection-position-statements .
Provide details in the following box or an extra sheet.
Reference for the extra sheet.
6.3d Provide a document reference for any records, diagrams or borehole logs you have that can help us understand the design and construction of the system. For boreholes tell us about the casing design.
Document reference.
Provide photocopies where possible. If this is not possible (for example, if the documents are large or bulky) summarise any extra information you have on an extra sheet.
Reference for the extra sheet.
6.3e For an existing system being used to discharge effluent: Has maintenance been carried out on your non-British Standard infiltration system (for example, to aid effective drainage)?
No
Yes Provide details in the following box or an extra sheet.

EPB6 Version 13, June 2024 Page 62 of 65

Reference for the extra sheet. L

6.4a Is sufficient infiltration provided by the existing or proposed system to avoid surcharging, flooding or overland run off?
If you are using a non-British Standard infiltration system, it is your responsibility to ensure the system will provide adequate infiltration and we need you to show us you have assessed this.
No Yes
Provide details on how you have assessed this in the following box or an extra sheet.
Reference for the extra sheet.
If the proposed or existing system does not, or will not, allow sufficient infiltration for the volume of treated domestic effluent to avoid surcharging, flooding or overland run-off we are likely to refuse the environmental permit. Before proceeding with your application, you can apply for our enhanced pre-application advice. This is a chargeable service. For more information see: https://www.gov.uk/guidance/get-advice-before-you-apply-for-an-environmental-permit .
6.4b Tell us how your non-British Standard infiltration system is no deeper than needed to allow appropriate infiltration for the discharge. For the depth given in question 6.2c, provide details on how you have addressed this requirement.
It is important that non-British Standard infiltration systems should be no deeper than is needed to allow appropriate infiltration for the discharge.
Provide details in the following box or an extra sheet.
Reference for the extra sheet.

EPB6 Version 13, June 2024 Page 63 of 65

Section 7: Discharges onto land via grass plot

Ensure you have fully completed Section 4 before completing this section.
Site setting
7.1 Is your unlined grass plot liable to flooding?
No
Yes Tell us about when flooding occurs, the area it eovers and how long it typically lasts in the following box or an extra sheet.
Reference for the extra sheet.
7.2 What is the slope of your grass plot?
It should be no more than 12 degrees. If the slope of your grass plot is greater than 12 degrees, we are more likely to refuse an environmental permit for such discharges.
Tell us how you have calculated or measured the slope in the following box or an extra sheet.
Deference for the outre cheet
Reference for the extra sheet
7.3 Is the grass plot severely compacted?
No What part of the grace plot is compacted? How will this affect the ability of the land to affect
What part of the grass plot is compacted? How will this affect the ability of the land to allow the effluent to infiltrate to ground? What has caused the compaction? Provide these details in the following box or an extra sheet.
Reference for the extra sheet.

EPB6 Version 13, June 2024 Page 64 of 65

Operating Technique Document

7.4 We require your application to be accompanied by an operating technique document we can include in the permit:

Tick to confirm you are providing this as a standalone document in Word or PDF format.

Provide the number of each section in your operating technique document which contains the following compulsory information:

A site plan showing the extent, location and design of the grass plot

A site plan showing the extent, location and design of the grass plot.
Section No.
The design, operation, and maintenance of the grass plot.
Section No.
How the operator will ensure:
there is no ponding of effluent on the grass plot
Section No.
no run-off containing effluent can leave the plot boundary or cause a nuisance
Section No.
the requirements for no ponding and no effluent leaving the plot will still be met in the event the ground is:
frozen hard or snow-covered
Section No.
waterlogged due to prolonged rainfall
Coation No. 1

EPB6 Version 13, June 2024 Page 65 of 65