From: Steven Foster < Steven.Foster2@drax.com>

**Sent:** <u>10 May 2023 14:5</u>2

To:

Cc: Subject:

RE: Further information required for completion of Duly Making checks on application EPR-

VP3530LS-V022

Attachments: Appendix B.pdf; Variation Supporting Information V22 Drax Power Station VP3530LS V2.0

Second Stage Information.pdf; Appendix A.pdf

Please find the updated supporting information and appendix A and B in answer to questions 2 to 4 and the additional requests. I am still awaiting the modelling information from our contractors and will let you know if we need some additional time for their provision.

Best regards

Steven Foster

From:

Sent: 26 April 2023 15:42

To: Steven Foster < Steven. Foster 2@drax.com>

Cc:

Subject: Further information required for completion of Duly Making checks on application EPR-VP3530LS-V022

Dear Steven,

Thank you for submitting your responses to my email of 20/04/2023 (attached) regarding further information and outstanding payments required for completion of Duly Making checks on application EPR-VP3530LS-V022.

We have reviewed the documents submitted and the updated air quality modelling has been checked for Duly Making completeness by our AQMAU.

We have not been able to find all the information required to accept the air quality modelling information for Duly Making.

We therefore require/still require the following information to Duly Make your application:

1. Provide the modelling files used in your risk assessment of CO<sub>2</sub> emissions and/or a table with the inputs to the model [2].

The inputs data provided in your email of  $24^{th}$  April for the CO<sub>2</sub> vent modelling do not provide enough detail for us to be able to run our own modelling checks or see how you have dealt with uncertainty. At the very least for Duly Making we require the full inputs data for the Phast modelling plots shown in section 4.0 the report [2].

As previously discussed, we normally require the Modelling Files for Duly Making. You have indicated that these are not available to you. If you cannot provide these files, we will require new modelling files to be submitted after Duly Making and before AQMAU can audit your AQ modelling.

This new CO<sub>2</sub> venting modelling will need to be accompanied by a report that meets our guidance on AQ Modelling Reports: Environmental permitting: air dispersion modelling reports - GOV.UK (www.gov.uk). This new report must explain how you have developed your worst-case scenario to inform the modelling and how you have dealt with uncertainty (see further comment in the post Duly Making additional information requirements later in this email).

- 2. Provide the pollutant mass emission rates of the individual flues in table 8 [2] and the emission concentration and mass emission of the directly emitted nitrosamines [2]. Table 8[2] (Updated Emission Parameters for the Baseline and With PCC Scenarios) includes the individual flue parameters for the baseline versus with PCC case. The table includes emission concentrations based on the annual average Emission Limit values for pollutants. It does not include the pollutant mass emission rates (in g/s) input to the modelling and does not include the input data for assessment of nitrosamines.
- 3. Provide an updated table 8 [2] with the revised modelling [2] input data for assessment of short-term pollutant emissions.

Table 8 [2] (Updated Emission Parameters for the Baseline and With PCC Scenarios) relates only to the long term annual average emissions inputs parameters for the revised modelling. The revised modelling output includes short-term emissions outputs. We need table 8[2] to include the relevant short term **mass emission rates** of the individual flues used in the revised modelling [2].

4. Provide an updated table 8 [2] with the source term parameters and mass emission rates that represent the submitted modelling files and updated predictions presented in [2].

The modelling files represent a single site stack with combined flues, however, report [2] only depicts individual flues.

## **Notes**

- [1]. Variation to Operate Carbon Capture and Directly Associated Activities to on Unit 2 and/or Unit 1 at Drax Power Station (VP3530LS) (first submission) Referred as [1]
- [2]. Variation to Operate Carbon Capture and Directly Associated Activities to on Unit 2 and/or Unit 1 at Drax Power Station (VP3530LS) Supplemental Information Provision and Appendix B (second submission) Referred as [2]

We require the above information to Duly Make your application. Please provide the outstanding information detailed above by the 11<sup>th</sup> of May 2023. If we do not receive the information by this date, we will not do any further work on your application.


We'll assess your claim for confidentiality once we have received all the staged application information and your application is duly made.

We will also require the following information before we can carry out our full review of the air emissions risk assessment.

The information is as follows and relates to the air dispersion modelling in submitted in both reports [1] and [2].

- Provide location and dimensions of all buildings included in the model, adding their National Grid reference, height, width and rotation. The modelling files include buildings, however, these are not presented in the reports.
- Please explain how you have worked out the **combined exhaust source term parameters** and justify the rationale and appropriateness of the combined exhaust temperatures, diameters and velocities.
- You must explain how you have worked out the pollutant emission rates used in your model. Please present
  a table of pollutant emission concentration (or ELVs), actual (and actual conditions) and normalised volume
  flows, and pollutant emission rates per individual flue to evidence the combined emission scenarios and
  consistency.
- Please provide the **input parameters used in the amines chemistry module** and a justification that they are robust and fit for purpose, including the amine-specific atmospheric reaction parameters and the ratio of NO<sub>x</sub> to NO<sub>2</sub> at the stack. Please include the high and low range kinetic parameter values considered in your sensitivity analysis and their source of information.

- Please explain your approach to estimate acid deposition impacts at Thorne Moor (SAC, SSSI) and Lower
  Derwent Valley (SAC) and clarify whether all potential acidifying pollutants released have been included (i.e.
  HCl).
- Uncertainty (CO<sub>2</sub> modelling) [2]: Your report must show that you have dealt with the uncertainty. This can be shown by undertaking sensitivity analysis to deal with variability in your input data and consulting modelling software validation documents/field experiments on releases with similar characteristics. In this case, for example, you show that the vent openings (e.g. opening size, potential phase change through constriction and after expansion, etc.), mass emissions (peak), CO<sub>2</sub> physicochemical conditions and modelling software are not variable(s) that would affect conclusions based on the risk assessment criteria. Please consider our modelling guidance at <a href="Environmental permitting: air dispersion modelling reports-GOV.UK (www.gov.uk)">Environmental permitting: air dispersion modelling reports-GOV.UK (www.gov.uk)</a> [Accessed Apr-23].

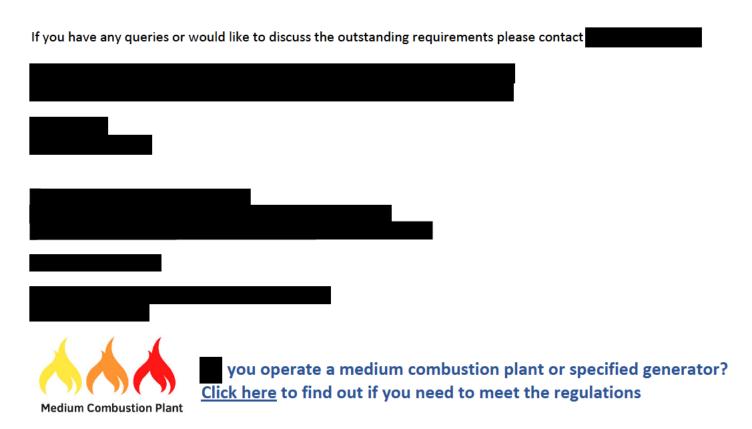

Information in this message may be confidential and may be legally privileged. If you have received this message by mistake, please notify the sender immediately, delete it and do not copy it to anyone else. We have checked this email and its attachments for viruses. But you should still check any attachment before opening it. We may have to make this message and any reply to it public if asked to under the Freedom of Information Act, Data Protection Act or for litigation. Email messages and attachments sent to or from any Environment Agency address may also be accessed by someone other than the sender or recipient, for business purposes.

Drax Power Limited Registered in England and Wales, Number 4883589. Registered Office: Drax Power Station, Selby, North Yorkshire YO8 8PH CONFIDENTIALITY NOTICE The contents of this email, and any files transmitted with it, are confidential to the ordinary user of the email address to which it was addressed and may also be privileged. If you are not the addressee of this email you may not copy, forward, disclose or otherwise use it or any part of it in any form whatsoever. If you are not the intended recipient, or have received this email in error please email the

sender immediately by replying to this message, and delete the material from any computer. This message and its contents are attributed to the sender and may not necessarily reflect the view of Drax Power Limited, its parent, subsidiaries or associates.