


ENVIRONMENTAL RISK ASSESSMENT

4 Groby Road North, Audenshaw, Manchester, M34 5HG

Kenny Services Limited

Version:	1.2	Date:	12 January 2026		
Doc. Ref:	GRO-477-D	Author(s):	JU	Checked:	MM
Client No:	477	Job No:	002		

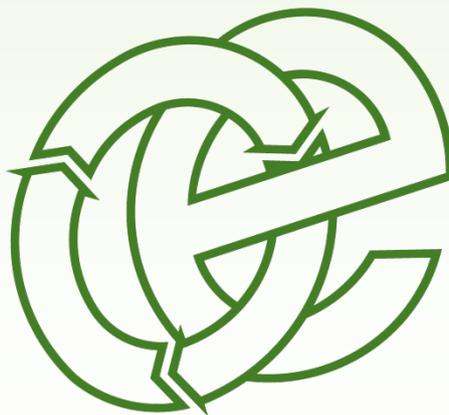

Oaktree Environmental Ltd

Waste, Planning & Environmental Consultants



Oaktree Environmental Ltd, Lime House, 2 Road Two, Winsford, Cheshire, CW7 3QZ
Tel: 01606 558833 | E-Mail: sales@oaktree-environmental.co.uk | Web: www.oaktree-environmental.co.uk
REGISTERED IN THE UK | COMPANY NO. 4850754

Document History:

Version	Issue date	Author	Checked	Description
1.0	26/02/2025	JU	MM	Draft
1.1	27/02/2025	JU	MM	Application submission
1.2	12/01/2026	JU	MM	Application resubmission

CONTENTS

DOCUMENT HISTORY:	I
CONTENTS	II
LIST OF APPENDICES:	III
1 INTRODUCTION	1
1.1 NOTE	1
2 SITE LOCATION AND RECEPTORS	2
2.1 SITE LOCATION	2
2.2 SENSITIVE RECEPTORS	2
3 ENVIRONMENTAL RISK ASSESSMENT MODEL	4
3.1 FUNDAMENTAL CONSIDERATIONS	4
3.2 PATHWAY	4
3.3 CONSEQUENCES	4
3.4 EFFECTS OF CONSEQUENCES	5
3.5 RISK ESTIMATION AND EVALUATION (PROBABILITY/FREQUENCY OF OCCURRING HAZARD)	5
3.6 RISK ASSESSMENT OUTCOME (COMBINATION OF PROBABILITY & CONSEQUENCE)	5
4 RISK ASSESSMENT TABLE	7

List of Appendices:

Appendix I - Risk Assessment Table

Appendix II - Drawings

Drawing No. GRO/477/04 – Receptor Plan

1 Introduction

1.1 Note

1.1.1 Oaktree Environmental Ltd have been instructed by Kenny Services Limited (the Operator) to prepare this Environmental Risk Assessment (ERA) to support a bespoke Environmental Permit application at 4 Groby Road North, Audenshaw, Manchester, M34 5HG. The existing permit operated by Kenny Waste Management Limited authorises a household, commercial and industrial waste transfer station with treatment facility. A permit surrender application has been submitted for the sites existing permit to allow for the new bespoke permit application to be implemented.

1.1.2 The purpose of this new bespoke EP application is to allow for the following activities to be undertaken externally:

- a) Sorting (with loading shovel/360° excavator or by hand).
- b) Manual separation (by picking line).

1.1.3 This ERA considers the potential and actual risks associated with the proposed changes (listed in point 1.1.3 above). This ERA does not aim to provide detailed Health and Safety risk assessments as required separately through the necessary legislation.

1.1.4 All site staff should be provided with a copy of this ERA and be aware of where it is located on site.

1.1.5 All environmental risks identified in this document should be acted upon accordingly by site management to ensure all environmental risks can be appropriately managed / controlled.

2 Site Location and Receptors

2.1 Site Location

2.1.1 The site is located at 4 Groby Road North, Audenshaw, Manchester, M34 5HG. The National Grid Reference (NGR) SJ 91963 97666 and is accessed via Audenshaw Road.

2.1.2 Land use surrounding the site is predominantly industrial comprising of commercial and industrial premises off Groby Road with the nearest residential premises off Audenshaw Road south of the site.

2.2 Sensitive Receptors

2.2.1 Sensitive receptors within 1km of the site are illustrated on Drawing No. GRO/477/04 Receptor Plan, see Appendix II.

2.2.2 Table 1 shows the approximate distance and orientation of sensitive receptors from the site.

Table 1 - Sensitive Receptors

Receptor	Direction from Site	Approx distance from the site boundary to the receptor boundary (m)
Commercial / Industrial		
Bora Construction Ltd	West	0
Ashton Packet Boat	North	10
Powershift Blast Cleaning Ltd	East	30
First Aid For All	South	10
H T F Transport	West	20
Residential		
Residential property (Audenshaw Road)	South	75
Residential Property (Slate Lane)	Northwest	325
Schools		
Poplar Street Primary School	South	770
Audenshaw Secondary School	South	942
Watercourses		
Ashton Canal	North	10
Audenshaw Reservoir	South	560
River Tame	Southeast	1,000
Infrastructure (major roads and transport links)		
M60 Motorway	North	73
A6140	East	143
Audenshaw Railway Line	Northwest	40
Ecological Sites		
Priority habitat (Deciduous Woodland)	Southeast	723

3 Environmental Risk Assessment Model

3.1 Fundamental Considerations

3.1.1 **Source/Hazard:** A property or situation that in particular circumstances could lead to harm.

3.1.2 **Consequences:** The adverse effects or harm as the result of realising a hazard which causes the quality of human health or the environment to be impaired in the short or long term.

3.1.3 **Risk:** A combination of the probability of occurrence of a defined hazard and the magnitude of the consequences of the occurrence.

3.2 Pathway

3.2.1 Important in the assessment of a particular risk(s) and to inform the subsequent management of the risk(s) is the identification of the pathway(s) through which the risk may affect the identified receptor(s). The following are examples of pathways:

- Air (windblown dust etc.).
- Ground (leaching of contaminants into underlying aquifers).
- Water (hydrocarbon run off into surface waters).
- Direct contact / exposure.

3.3 Consequences

3.3.1 The following Table highlights the consequences of the hazard(s) identified and the abbreviations for each as used in the Risk Assessment Table in Section 3:

Abbreviation	Consequences
A	Minor Injury
B	Major Injury
C	Death
D	Air Pollution
E	Water Pollution
F	Pollution of Land

3.4 **Effects of Consequences**

3.4.1 In order to quantify the level of risk and identify the appropriate management procedures, the potential effects must be considered, as outlined in the Table below:

Abbreviation	Consequences	Management Requirements
S	SEVERE	In all cases
Mo	MODERATE	In most cases
Mi	MILD	Occasionally
N	NEGLIGIBLE	No

3.4.2 Note: “Management” is the action required to reduce the risk of a hazard causing a problem on site. Contingency measures are procedures which are in place to reduce the consequences of a hazard.

3.5 **Risk Estimation and Evaluation (Probability/Frequency of Occurring Hazard)**

3.5.1 The following Table allows the likelihood of an occurrence of an identified risk to be assessed:

Abbreviation	Probability	Evaluation
1	Very likely	Could occur during any working day
2	Likely	Could occur regularly
3	Possible	Event possible
4	Unlikely	Event very unlikely

3.6 **Risk Assessment Outcome (Combination of Probability & Consequence)**

3.6.1 The following Table shows the resultant risk of an identified hazard or potential situation. This uses the hierarchy of both probability and consequence to assess the level of risk. The level of risk determines what level of management would be required in order to reduce the risk of occurrence and/or scale.

		Consequence			
		S	Mo	Mi	N
Probability	1	High	High	Medium	Low
	2	High	Medium	Low	Negligible
	3	Medium	Low	Negligible	N/A
	4	Low	Negligible	N/A	N/A

- 3.6.2 Where the risk assessment outcome is high, first-level management of the risk is essential, i.e. removal of hazard, implementation of major infrastructure/structural design measures to contain the risk/hazard and company policy changes to incorporate the management of the risk. All risk management measures must be supplemented with detailed induction training, spot training and tool-box talks to ensure all site staff and users are made fully aware of the risk/hazard, all potential consequences and necessary management and contingency procedures.
- 3.6.3 Where the risk assessment outcome is medium, the management of the risk should be tackled by management or delegates. If removal of the hazard is not possible, management will normally be met through implementing minor structural design measures or by imposing procedures for the prevention of occurrences which will be conveyed to all site staff through the appropriate training, including any contingency measures/procedures.
- 3.6.4 Where the risk assessment outcome is low, the management of the risk can be done wholly through appropriate training to site staff including any contingency measures/procedures.
- 3.6.5 Where the risk assessment outcome is near-zero, site staff should be made aware of the possibility of an occurrence and contingency measures should be readily available to all staff should they be required.

4 Risk Assessment Table

- 4.1 The following pages contain the site-specific risk assessment for the site with appropriate remedial actions, recommendations and comments included for each identified hazard, potential contaminant, or situation.
- 4.2 The Table also contains references to the appropriate section(s) of the site's EMS for additional management procedures.
- 4.3 As discussed in Section 3.6 above, all situations which identify a risk from Low – High should be incorporated into the staff/visitor training schedule, where appropriate and acted on as required.

SEE TABLES OVERLEAF

Appendix I

RISK ASSESSMENT TABLES

Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
Dust / particulates	<p>Release of dust via one of the following channels:</p> <ul style="list-style-type: none"> Waste delivery vehicles deposit and collect potentially dusty waste during dry and windy weather conditions. Storage of potentially dusty/waste material externally. Dust / debris on site surfaces. Wastes dropping from conveyors into stockpiles Prolonged periods of dry/warm weather or conditions where winds reach 4+ on the Beaufort Wind Scale Particulate emissions from the exhaust of vehicles / plant /generators and other non-road going machinery on site 	Air	<p>Local human population, including industrial units, neighboring businesses, residential dwellings and surface water features, specifically:</p> <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings situated on Audenshaw Road. Canal located north (Local Wildlife Site) 	<p>Harm to human health – respiratory irritation and illness</p> <p>A, B, D, E</p>	Mo	3	Low	<p>The Operator will continue to implement the following to minimise the risk of dust from the site:</p> <ul style="list-style-type: none"> Strict waste acceptance procedures are implemented to ensure that loads comprising mainly dust, powders or loose fibers are not accepted on site. All vehicles delivering and exporting waste will be sheeted. Drop heights will be minimized as far as reasonably practicable. Hoses, mains water and water storage tanks will be utilised to dampen stockpiles and site surfaces. Potentially dusty waste that has been stockpiled will be dampened regularly in dry and windy conditions. This reduces the amount of dust which could be suspended and therefore the amount of dust that has the potential to extend beyond the permit boundary. The proposed external storage of wastes that are likely to generate dust have been fitted with a misting system this includes the plasterboard bay, light C&D waste bay and the Heavy Inserts Bay. Hoses can be utilised to wash the wheels of vehicles leaving the site to remove any mud, dust or debris and minimise the risk of mud on surrounding roads. In the event of mud being tracked off site and onto the main roads it will be treated as an emergency and cleaned by site operatives using manual techniques or if required the operator will organise for a road sweeper to be deployed. Site operatives will continuously monitor dust emissions whilst the site is in operation and will report back to the site manager for advice if required. The site manager will make a formal visual inspection of dust emissions at least twice per day when operations with the highest dust potential are being undertaken. Results of monitoring will be recorded in the site diary/record forms. The requirements of a Dust & Emissions Management Plan (DEMP) are implemented on site. The DMP outlines all mitigation measures to be implemented on site and what to do in the event of dust extending beyond the permit boundary.

Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
Odour	<p>Biodegradable waste stored on site.</p> <p>Cracks in impermeable concrete pad leading to trapped waste.</p> <p>Dry and hot weather conditions exceeding three days.</p> <p>Prevailing wind towards residential receptor locations transporting odour.</p> <p>Staff negligence leading to odour releases from unauthorised waste.</p>	Air transport then inhalation	<p>Local human population, including industrial units, neighboring businesses, and residential dwellings, specifically:</p> <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings situated on Audenshaw Road. Canal located north (Local Wildlife Site) 	A, D	Mi to Mo	3	Low	<p>There are no proposed changes to the waste types currently accepted at the site. The new bespoke EP proposes to store waste externally which increases the potential for odour to be detected by nearby receptors. The Operator will implement the following to minimise the risk of dust from the site:</p> <ul style="list-style-type: none"> Strict waste acceptance procedures are implemented to ensure that no malodorous waste is accepted. Any wastes discovered to be malodorous following acceptance / deposit into the waste reception area will be quarantined and removed from site as soon as practicable within 48 hours. If any waste stored on site begins to give rise to odour that can be detected offsite the waste will be quarantined and stored in a weatherproof sealed container before being removed from site. Any odorous waste will be removed from site within 48 hours. Good housekeeping measures are actively maintained on site to reduce the risk of odour. Site operatives will be sufficiently trained and undergo continuous training on identifying odorous wastes or non-conforming wastes that could give rise to odour. The condition of the impermeable pad will be checked on a weekly basis to ensure there are no cracks that could lead to trapped waste and developing odour. The requirements of an odour management plan (OMP) are implanted on site. The OMP outlines all mitigation measures to be implemented on site and what to do in the event of odour detection outside the permit boundary.
Waste, litter and mud on local roads	<p>Litter escaping the site boundary (windblown).</p> <p>Vehicles delivering / removing waste including unsheeted / poorly sheeted skips.</p> <p>Poor or faulty storage containment.</p> <p>Poor housekeeping.</p> <p>Staff negligence leading to litter escaping off site</p>	<p>Vehicles entering and leaving the site.</p> <p>Air Transport (windblown)</p>	<p>Local human population, including adjacent commercial / industrial units, other neighboring businesses, and surrounding transport infrastructure, specifically:</p> <ul style="list-style-type: none"> Site workers and visitors. Other commercial/ind 	A to C E & F	Mi to Mo	3	Low	<p>The greatest risk of litter would be during windy conditions. This bespoke EP application proposes to store waste externally which increases the potential for litter to be windblown off site. The Operator will implement the following to minimise the risk of litter escaping the permit boundary:</p> <ul style="list-style-type: none"> The site will be operated to a lesser degree during these conditions giving due regard to the potential effects of windblown litter. Site inspections including litter checks will take place on a regular basis to identify and remove any litter from the site. Waste stored in bays is stored with a freeboard of 1m to prevent waste escaping the bay or becoming wind whipped.

Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
			<p>ustrial business users.</p> <ul style="list-style-type: none"> Residential dwellings situated on Audenshaw Road. Canal located north (Local Wildlife Site) 					<ul style="list-style-type: none"> Good housekeeping measures are actively maintained on site to reduce the risk of litter. Vehicles leaving the site will be sheeted and if required will undergo wheel washing to prevent mud being tracked onto the local highway. In the event of mud being tracked off site and onto the main roads it will be treated as an emergency and cleaned by site operatives using manual techniques or if required the operator will organise for a road sweeper to be deployed.
Noise/ vibration	<p>Plant and machinery breakdowns or malfunctions.</p> <p>Tipping / loading of waste.</p>	Noise through the air or vibration through the ground	<p>Local human population, including industrial units, neighboring businesses, and residential dwellings and surface water features, specifically:</p> <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings situated on Audenshaw Road. 	A, D	Mo	3	Low	<p>Following the return of the application another representative noise impact assessment has been commissioned and will be sent as part of this application.</p> <p>In order to manage the emanating from the site for the proposed operations there has been a Noise Management Plan (NMP) produced to accompany this bespoke permit application. Which includes the following measures that will be adopted on the site:</p> <ul style="list-style-type: none"> A 5mph speed limit is enforced on site. All plant and equipment will be maintained in accordance with the manufacturers' recommendations to keep plant and equipment functioning correctly and minimise noise generation. Plant and equipment will only be operated when necessary. Pre-use checks are undertaken prior to using plant or equipment. Defects are reported and actions taken to rectify the problem. Engines will be switched off when not in use. No plant, equipment or vehicles will be left idling. Drop heights of materials will be reduced as far as practicable. <p>The noise impact assessment concluded that the resultant impact for the operations during the weekday on those nearest sensitive receptors is classed as low impact or no impact, the resultant impact for the weekend operations is concluded at an adverse impact. However, given that the site is maintaining the existing operations and throughput and is acting as a waste transfer facility further limiting the operations on site and adding additional physical screening barriers will limit the sites operations and the use of additional screening cannot be built onto the existing barriers.</p>

Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
Vermin causing leptospirosis and other respiratory diseases	Poor housekeeping. Staff negligence leading to acceptance of unauthorised waste giving rise to pests. Storing waste for excessive time periods.	Water, direct contact with waste	Local human population, including users of adjacent commercial / industrial units, other neighboring businesses, residential dwellings and surface water features, specifically: <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings situated on Audenshaw Road. Canal located north (Local Wildlife Site) 	A to C	Mi to Mo	4	Negligible	There are no proposed changes to the waste types accepted at the site as part of this new bespoke EP application. Therefore, it is considered there is no increased risk of attracting vermin. The operator implements the following: <ul style="list-style-type: none"> Strict waste acceptance procedures are implemented to ensure no food waste or waste that could attract vermin are accepted. Mixed municipal waste (EWC code 20 03 01) can be accepted at the site. Once a load has been tipped, if any waste that could give rise to pests such as food waste is detected it will be segregated in the quarantine area and removed from site as soon as practicable. Good housekeeping measures are actively maintained to reduce the potential of attracting pests. Housekeeping inspections take place daily at the end of each working day to collect any waste produced by on-site operatives. An appropriate pest controller will be called in the event of pests being present at the site or complaints received relating to pests.
Fire/ smoke / particulates	Plant failure Combustible waste types Arson and or vandalism Staff negligence Discarded smoking materials Hot exhausts Industrial heating Build up of loose combustible waste, dust and fluff Hot loads	Air transport of smoke	Local human population, including industrial units, neighboring businesses, and residential dwellings and surface water features, specifically: <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings 	A to F	Mi to S	3	Medium	There are no proposed changes to the EWC codes or waste types accepted at the site. The waste types currently accepted consist of combustible waste which has the potential for a fire. Therefore, the operator implements the following: <ul style="list-style-type: none"> Strict waste acceptance procedures are implemented to reduce the likelihood of non-conforming waste being accepted. Combustible waste will be stored in accordance with the Environment Agencies Fire Prevention Plan guidance. Storage times and quantities will be significantly less than those in the guidance. Plant and equipment are maintained in accordance with manufacturer recommendations. A no smoking policy is implemented on site, those who wish to smoke will need to do so within the designated smoking area.

Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
	Leaks and spillages of oil and fuel		<p>situated on Audenshaw Road.</p> <ul style="list-style-type: none"> Canal located north (Local Wildlife Site) 					<ul style="list-style-type: none"> Checks will be performed at the end of each working day to ensure there is no buildup of dust or fluff on plants and equipment to minimise the risk of fire caused by dust settling on hot exhausts and engine parts. All staff are fully trained in recognition of early fire signs and trained to prevent negligence. Fire-fighting equipment on site includes mains water, hoses, water storage containers and fire extinguishers. Site security measures to reduce the risk of arson, including lockable gates that remain locked outside of operational hours, CCTV monitored by a third party security company out of operational hours. Flame detection systems above combustible waste storage areas. The requirements of a Fire Prevention Plan (FPP) are implemented on site. Inspections are undertaken of waste storage areas to ensure combustible waste is not stored more than the time periods stated in the FPP. Further mitigation measures and responses implemented in the event of a fire are listed in the FPP.
Vehicle collision/ accidents including impacts and injury	<p>Poor visibility</p> <p>Spillages of oils/fluids causing vehicles to skid.</p> <p>Lack of PPE worn by staff.</p> <p>Staff negligence i.e. mobile plant operators.</p> <p>Excessive waste storage causing collapse of stored materials / falling materials and reducing accessibility around the site.</p>	Direct contact	<p>Visitors to the site and workers employed by the operator.</p> <p>Pedestrians</p>	A to F	Mi to S	3	Low	<p>There are no proposed changes to the throughput of waste and therefore it is not anticipated there will be an increase in vehicles delivering waste to the site. The operator will continue to implement the following:</p> <ul style="list-style-type: none"> Ensure all free-standing waste storage areas are in the correct locations and access areas are kept clear as shown on Drawing No. GRO/477/03 Site Layout & Fire Plan. An accident logbook is kept in the site office so all new and existing staff members can review previous accidents. Appropriate signage throughout the site. All staff have radios and use horns / alarms on equipment to alert them of their presence. The operator has trained staff who control vehicle movements throughout the site. Vehicle movements on site are restricted to 5mph.



Hazard / Potential Contaminant or Situation	Source(s)	Pathway	Receptor(s)	Consequences	Effect	Probability	Assessment Outcome	Remedial Action/ Recommendations/ Comments
Leachate	<p>Poor housekeeping</p> <p>Staff negligence leading to acceptance of unauthorised waste giving rise to leachate</p> <p>Overflowing waste storage skips</p> <p>Water through ground from mobile dust suppression and rainwater</p>	Ground	<p>Surface water features and areas of sensitive ground, specifically:</p> <ul style="list-style-type: none"> Canal located north (Local Wildlife Site) 	E, F	Mi to S	3	Low	<ul style="list-style-type: none"> HCl waste is stored on an impermeable concrete pad with sealed drainage system. The integrity of the impermeable pad is checked by site operatives as part of the inspection checklists to ensure it is in good condition. Any defects or faults are reported to the site manager. Actions to repair any faults are recorded and undertaken as soon as practicable to prevent further risk. Any wastes which are liable to give rise to contamination will be removed from site or placed into the quarantine skip/area. The FPP has a dedicated section on firewater containment measures.
Hydrocarbons including release of gases/fumes/vapours/volatiles	<p>Spills from fuel tanks</p> <p>Drips when refueling</p> <p>During delivery</p> <p>Leakage from stored drums</p> <p>Fixed and mobile plant malfunction</p> <p>Mixing of waste/chemicals</p> <p>Spillage of chemicals</p> <p>Overtaken vehicle plant/plant failure</p> <p>Reaction between stored wastes</p>	<p>Ground - direct contact, ingestion</p> <p>Inhalation (of volatiles)</p>	<p>Local human population, including industrial units, neighboring businesses, and residential dwellings and surface water features, specifically:</p> <ul style="list-style-type: none"> Site workers and visitors. Other commercial/industrial business users. Residential dwellings situated on Audenshaw Road. Canal located north. (Local Wildlife Site) 	A, B, D, E, F	Mi to S	3	Low	<ul style="list-style-type: none"> There are no proposed changes to waste types accepted at the site and therefore an increased risk of hydrocarbons is considered negligible. Where plant is operated, spill kits will be available to ensure that any fuel spillages are cleared. All site surfaces will be inspected daily for the presence of spillage when the site is in operation. Debris will be swept as required and placed in a skip for further processing on site and sent to a suitably permitted site. An impermeable pad with sealed drainage system will reduce the impacts of any spills. Very little potential for hydrocarbons to be released from site given the waste types accepted and stored i.e. no ELVs. No gas is stored on site.

Appendix II

Drawings

KEY:

- Permit boundary
- Main River
- Surface water body (river / stream / pond / pool / lake)
- Workplaces (includes agriculture industry, commerce and retail)
- Areas with mix of residential, retail and commercial properties
- Residential blocks
- Class A, B, C roads
- H Nearest fire hydrant
- Railway line
- SCH School
- Woodland areas
- Priority habitat inventory (deciduous woodland)

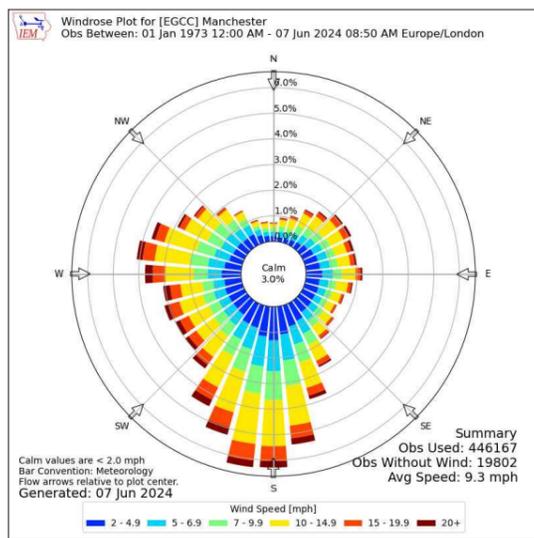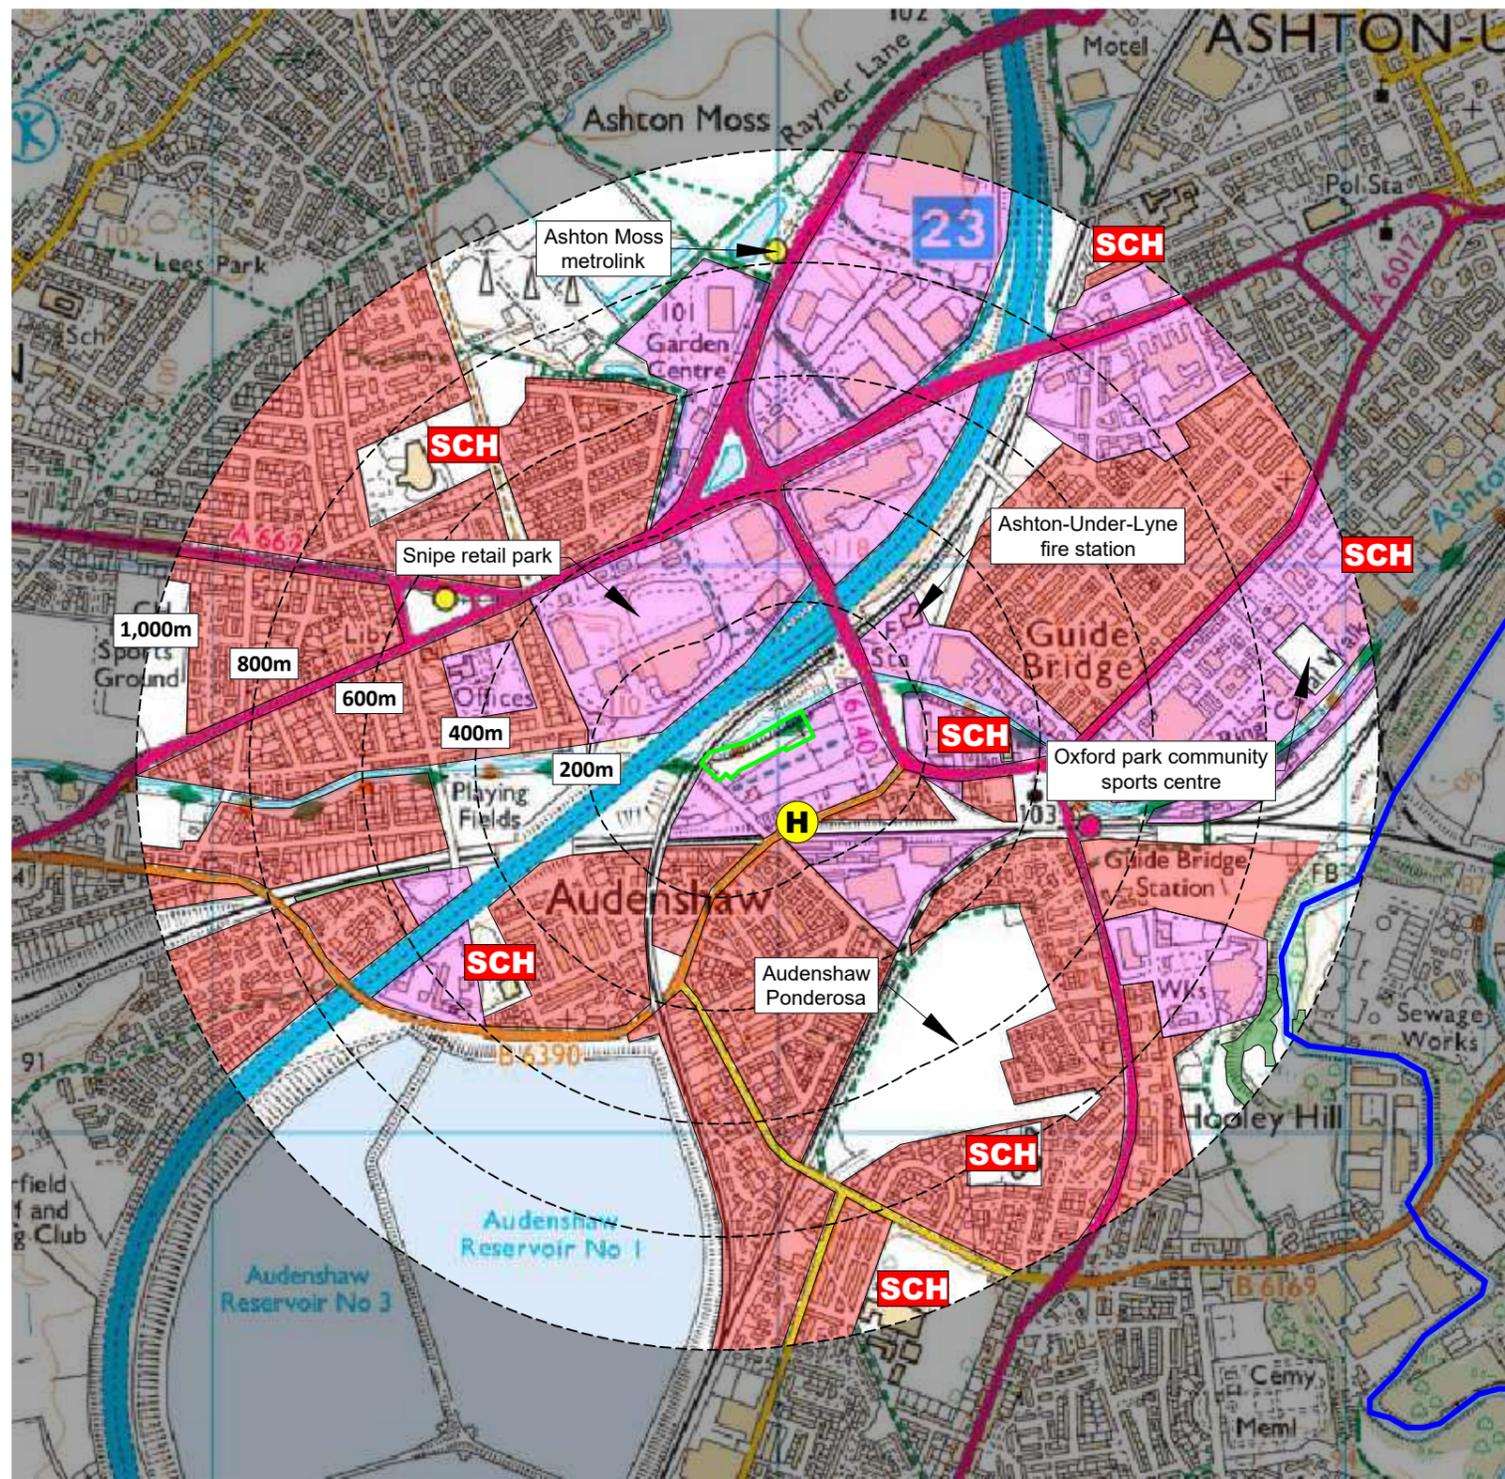

Compass Wind Rose for (EGCC) Manchester
 Period 1973-2024
 - source: Iowa State University


NOTES

1. Boundaries are shown indicatively.
2. Wind rose data shows the prevailing wind direction to be Southerly.

Drawing for indication only. Reproduced with the permission of the controller of H.M.S.O. Crown copyright licence No. 100022432. This drawing is copyright and property of Oaktree Environmental Ltd.

REVISION HISTORY

Rev:	Date:	Init:	Description:
-	18.12.25	JH	Initial drawing



TITLE: RECEPTOR PLAN		
CLIENT: Kenny Services Limited		
PROJECT/SITE: Groby Road North, Audenshaw M34 5HT		
SCALE @ A3: 1:12,500	CLIENT NO: 477	JOB NO: 001
DRAWING NO: GRO-477-04	REV: -	STATUS: Issued
DATE: 18.12.25	DRAWN: JH	CHECKED: RS

